



V-DRIVES

Stock Drives Catalogue

Variable Speed Drives
& Accessories



V-DRIVES

AC Variable Speed Drives



AMC

Pages 2-7

Page AC Variable Speed Drives

2 V-DRIVE AMC

8 V-DRIVE GPD

12 V-DRIVE GPD1

14 V-DRIVE EPC

Options

21 Keypads & Displays

22 Plug-in Options

23 Software / Commissioning

24 Networking Options

25 Input Chokes

26 Output Chokes

27 EMC Filters

27 Brake Resistors

28 Local Isolator

28 Through Hole Mount Kits

29 Options Compatibility

Easy to use, reliable
products with
incredible performance



Motor Types	3 Phase Induction Motor (IM) Permanent Magnet AC Motor (PM) Brushless DC Motor (BLDC) Synchronous Reluctance Motor (SynRM)	
Typical Applications	Fans Pumps	
Input Ratings	Supply Voltage	200 – 240 Volts $\pm 10\%$ 380 – 480 Volts $\pm 10\%$ 500 – 600 Volts $\pm 10\%$
Output Ratings	Output Power	230 Volt 1 Phase Input : Up to 10.5A / 2.2kW / 3HP 230 Volt 3 Phase Input : Up to 248A / 75kW / 100HP 400 Volt 3 Phase Input : Up to 450A / 250kW / 350HP 460 Volt 3 Phase Input : Up to 450A / 250kW / 350HP 575 Volt 3 Phase Input : Up to 150A / 110kW / 150HP
	Overload Capacity	150% for 60 Seconds 200% for 4 seconds
Ambient Conditions	Temperature	-10 – 50°C
	Humidity	95% Max, non condensing
Enclosure	Ingress Protection	IP20, IP55, IP66
Programming	Keypad	Built-in Keypad as standard Optional remote mountable keypad
	Display	Built-in multi language text display (IP55 & IP66) 7 Segment LED (IP20)
Control Specification	Control Method	V/F Control Energy Optimised V/F 3GV Sensorless Vector Speed Control 3GV Sensorless Vector Torque Control Closed Loop (Encoder) Speed Control Closed Loop (Encoder) Torque Control PM Vector Control BLDC Control Synchronous Reluctance Motor Control
	PWM Frequency	4 – 32kHz Effective
	Braking	Motor Flux Braking Built-in Braking Transistor
	Setpoint Control	Analog Signal
		0 to 10 Volts 10 to 0 Volts -10 to + 10 Volts 0 to 20mA 20 to 0mA 4 to 20mA 20 to 4 mA
		Digital
		Motorised Potentiometer (Keypad) Modbus RTU CANopen
	Fieldbus Connectivity	CANopen
		125 – 1000kbps
		Modbus RTU
		9.6 – 115.2 kbps selectable 8N1, 8N2, 8E1, 8O1
I/O Specification	Programmable Inputs	5 Total as standard (Optional additional 3) 3 Digital (Optional additional 3) 2 Analog / Digital Selectable
		8 – 30 Volt DC, internal or external supply Response time < 4ms
	Digital Inputs	Resolution : 12 bits Response time : < 4ms Accuracy : <1% full scale Parameter adjustable scaling and offset
	Analog Inputs	4 Total (Optional additional 3) 2 Analog / Digital 2 Relays (Optional additional 3)
	Programmable Outputs	Maximum Voltage : 250 VAC, 30 VDC Switching Current Capacity : 6A AC, 5A DC
	Relay Outputs	0 to 10 Volt 0 to 20mA 4 to 20mA
	Analog Outputs	
	Application Features	PID(D) Control
		Internal PID Controller Multi Setpoint Select Standby / Sleep Mode Boost Function
		Fire Mode
		Load Monitoring
	Duty / Assist / Satndby	
	Hoist Mode	Dedicated Hoist Mode Motor Holding Brake Pre-Torque & Control Over Limit Protection
	Pump Blockage Detection	
	Pump Cleaning	
	Multi-pump control	
	Pump Stir	





GPD

Pages 8–11

GPD1

Pages 12–13

EPC

Pages 14–19

3 Phase Induction Motor (IM) Permanent Magnet AC Motor (PM) Brushless DC Motor (BLDC) Synchronous Reluctance Motor (SynRM) General Industrial Fans Pumps Crane & Hoist		Single Phase AC Motor Permanent Split Capacitor (PSC) Shaded Pole General Industrial Fans Pumps		3 Phase Induction Motor (IM) Permanent Magnet AC Motor (PM) Brushless DC Motor (BLDC) Synchronous Reluctance Motor (SynRM) General Industrial Fans Pumps	
110 – 115 Volts ± 10% 200 – 240 Volts ± 10% 380 – 480 Volts ± 10%		110 – 115 Volts ± 10% 200 – 240 Volts ± 10%		200 – 240 Volts ± 10% 380 – 480 Volts ± 10% 500 – 600 Volts ± 10%	
110 Volt 1 Phase Input: Up to 5.8A / 1.1kW / 1.5HP 230 Volt 1 Phase Input: Up to 15.3A / 4kW / 5HP 230 Volt 3 Phase Input: Up to 18A / 4kW / 5HP 400 Volt 3 Phase Input: Up to 46A / 22kW / 30HP 460 Volt 3 Phase Input: Up to 46A / 22kW / 30HP		110 Volt 1 Phase Input: Up to 10.5A / 0.55kW / 0.75HP 230 Volt 1 Phase Input: Up to 10.5A / 1.1kW / 1.5HP		230 Volt 1 Phase Input: Up to 10.5A / 2.2kW / 3HP 230 Volt 3 Phase Input: Up to 248A / 75kW / 100HP 400 Volt 3 Phase Input: Up to 450A / 250kW / 350HP 460 Volt 3 Phase Input: Up to 450A / 250kW / 350HP 575 Volt 3 Phase Input: Up to 150A / 110kW / 150HP	
150% for 60 Seconds 175% for 2.5 seconds -20 – 50°C		150% for 60 Seconds 175% for 2.5 seconds -20 – 50°C		110% for 60 seconds 165% for 4 seconds -10 – 50°C	
95% Max, non condensing IP20, IP66		95% Max, non condensing IP20, IP66		95% Max, non condensing IP20, IP55, IP66	
Built-in Keypad as standard Optional remote mountable keypad		Built-in Keypad as standard Optional remote mountable keypad		Built-in Keypad as standard Optional remote mountable keypad	
7 Segment LED		7 Segment LED		Built-in multi language text display (IP55 & IP66) 7 Segment LED (IP20)	
V/F Control Energy Optimised V/F Sensorless Vector Speed Control PM Vector Control BLDC Control Synchronous Reluctance Motor Control		V/F Voltage Vector Energy Optimised V/F		Eco Sensorless Vector Control Open Loop Permanent Magnet Vector Open Loop BLDC Vector Open Loop Synchronous Reluctance Vector	
4 – 32kHz Effective Motor Flux Braking Built-in Braking Transistor (Not Frame Size 1)		4 – 32kHz Effective Motor Flux Braking Built-in Braking Transistor (Frame Size 2)		4 - 32kHz Effective Motor Flux Braking	
Analog Signal	0 to 10 Volts 10 to 0 Volts 0 to 20mA 20 to 0mA 4 to 20mA 20 to 4 mA	Analog Signal	0 to 10 Volts 10 to 0 Volts 0 to 20mA 20 to 0mA 4 to 20mA 20 to 4 mA	Analog Signal	0 to 10 Volts 10 to 0 Volts -10 to + 10 Volts 0 to 20mA 20 to 0mA 4 to 20mA 20 to 4 mA
Digital	Motorised Potentiometer (Keypad) Modbus RTU CANopen	Digital	Motorised Potentiometer (Keypad) Modbus RTU CANopen	Digital	Motorised Potentiometer (Keypad) Modbus RTU BACnet MS/TP
CANopen	125 – 1000kbps	CANopen	125 – 1000kbps	BACnet MS/ TP	BACnet Application Specific Controller 9.6 – 76.8 kbps selectable Data Format: 8N1, 8N2, 8E1, 8O1
Modbus RTU	9.6 – 115.2 kbps selectable	Modbus RTU	9.6 – 115.2 kbps selectable	Modbus RTU	9.6 – 115.2 kbps selectable 8N1, 8N2, 8E1, 8O1
				BACnet/IP	Plug-in BACnet/IP Interface Dual LAN Ports Device Level Ring
				Other	PROFIBUS DP (DPV1) PROFINET IO DeviceNet EtherNet/IP EtherCat Modbus TCP
4 Total 2 Digital 2 Analog / Digital Selectable 8 – 30 Volt DC, internal or external supply Response time < 4ms Resolution : 12 bits Response time : < 4ms Accuracy : ± 2% full scale Parameter adjustable scaling and offset		4 Total 2 Digital 2 Analog / Digital Selectable 8 – 30 Volt DC, internal or external supply Response time < 4ms Resolution : 12 bits Response time : < 4ms Accuracy : ± 2% full scale Parameter adjustable scaling and offset		5 Total as standard (Optional additional 3) 3 Digital (Optional additional 3) 2 Analog / Digital Selectable 8 – 30 Volt DC, internal or external supply Response time < 4ms Resolution : 12 bits Response time : < 4ms Accuracy : <1% full scale Parameter adjustable scaling and offset	
2 Total 1 Analog / Digital 1 Relay Maximum Voltage : 250 VAC, 30 VDC Switching Current Capacity : 6A AC, 5A DC		2 Total 1 Analog / Digital 1 Relay Maximum Voltage : 250 VAC, 30 VDC Switching Current Capacity : 6A AC, 5A DC		4 Total (Optional additional 3) 2 Analog / Digital 2 Relays (Optional additional 3) Maximum Voltage : 250 VAC, 30 VDC Switching Current Capacity : 6A AC, 5A DC	
0 to 10 Volt		0 to 10 Volt		0 to 10 Volt 0 to 20mA 4 to 20mA	
Internal PI Controller Standby / Sleep Function		Internal PI Controller Standby / Sleep Function		Internal PID Controller Multi Setpoint Select Standby / Sleep Mode Boost Function	
Bidirectional Selectable Speed Setpoint (Fixed / PID / Analog / Fieldbus)		Selectable Speed Setpoint (Fixed / PID / Analog / Fieldbus)		Bidirectional Selectable Speed Setpoint (Fixed / PID / Analog / Fieldbus) Over Torque Protection (Fan / Bump Blocked) Under Torque Protection (Broken Belt / Shaft) Pump Blockage Detection with Cleaning Built-in Multi Pump Support Automatic Changeover on Fault Automatic Changeover on Run Time Fully Redundant	
				Pump load monitoring with autotune function, user configurable	
				Adjustable Bidirectional Pump Cleaning Cycle operation Control of fixed speed assist pumps (with cascade control module) Control of Duty, Assist and Standby variable speed pumps via internal Master – Slave network Automatic pump stir function	

V-DRIVE AMC

Advanced Motor Control

0.75 – 250kW / 1 – 350HP

200 – 600V Single & 3 Phase Input

World Leading Motor Control

Controlling the latest generation of permanent magnet motors and standard induction motors

V-Drive AMC offers the perfect combination of high performance together with ease of use to allow even the most demanding applications to be tackled easily.

- ... Low ambient operation (–10°C)
- ... Dedicated Hoist Mode
- ... CAN and Modbus RTU communication as standard

High Performance

Sensorless Vector Control

Up to 200% torque from zero speed ensures reliable starting and accurate speed control under all load conditions.

PM Motor Control

Future proof. Allows upgrade to the latest generation of high efficiency permanent magnet motors.

I/O & Communications

V-Drive AMC supports a wide range of interfaces to machine control systems.

Low Cost Installation

Built-in EMC Filter

An internal filter in every V-Drive AMC saves cost and time for installation.

Integral Brake Transistor

Saves space, cost and time for installation.

Powerful PC based commissioning software

OptiTools Studio

OptiTools Studio allows parameter upload, download and storage and access to V-Drive AMC's Simple PLC functionality.

See Page 24

OPTISTICK Smart

OPT-3-STICK-



NFC

Bluetooth®

- ... Allows copying, backup and restore of drive parameters
- ... Provides Bluetooth interface to a PC running OptiTools Studio or the OptiTools Mobile app on a smartphone
- ... Onboard NFC (Near Field Communication) for rapid data transfer



IP55 / NEMA 12

Up to 160kW



IP66 / NEMA 4X

Up to 11kW

Conveyer Systems Processing Plants Chemical
Manufacturing Pumping Machine Tools Plastics Rubber Elevators Cranes

150% overload for 60 seconds
200% overload for 4 seconds

Industrial heavy duty rating for every model



Convenient Help
Card



Multi Language Text Display
(IP20 size 4-7, IP55 & IP66)



DIN Rail Mount
(IP20)



Pluggable Terminals




High Quality
Long-life Fans



V-DRIVE AMC

High Performance | Easy to Use

Simple PLC Functionality

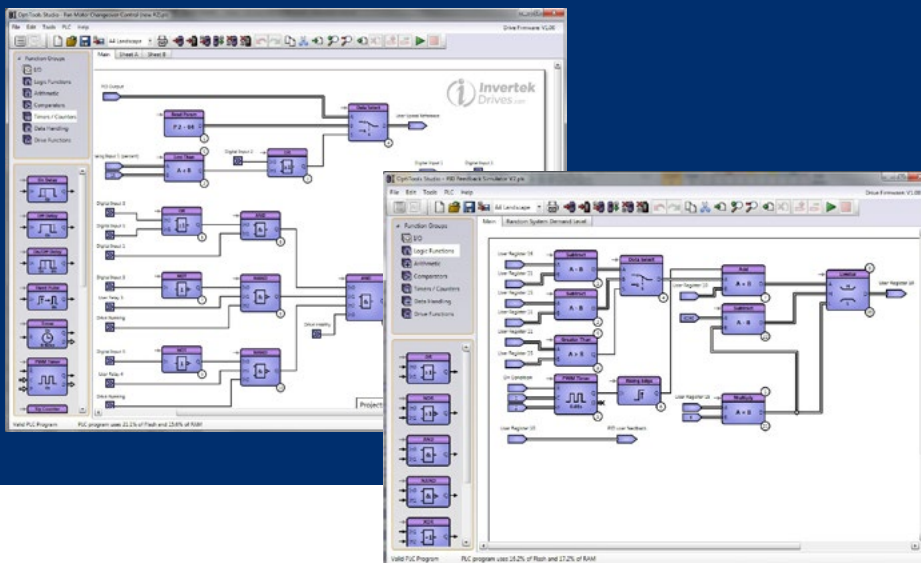

A wide range of function types available including:

- ... Programmable Logic Functions
- ... Comparators
- ... Timers
- ... Mathematical Functions
- ... Drive specific functions

All blocks can be easily combined to create flexible programs.

Programs can be protected to prevent unauthorised copying.

Complete control over the drive including all inputs and outputs.


Safe Torque Off (provided as standard)

V-Drive AMC features a safe torque off function to allow simple integration into machine critical safety circuits.


- ... Simple machine design reduces component costs, saves panel space and minimises installation time
- ... Faster shut down and reset procedures reduce system maintenance time
- ... Better safety standard compared to mechanical solution
- ... Better motor connection. Single cable with no interruption.



With



Without

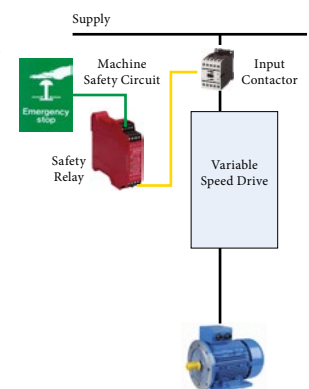



IP20

Up to 250kW



IP55

Up to 160kW



IP66

Up to 11kW

Advanced Motor Control

V-Drive AMC has been uniquely developed to allow a wide range of different motor types to be used, with only parameter changes being required. This technology allows the same drive to be used in a wide range of applications, allowing OEMs and end user alike to take advantage of the energy saving provided by using the latest motor technologies.

AC Induction Motors

The majority of AC motors in use today around the world are standard induction motors. These motors are relatively low cost, readily available and provide good performance with long service life. With the ever increasing focus on energy efficiency, motor manufacturers have refined and improved their designs in recent years.

V-Drive AMC has been developed to provide optimum control and maximum efficiency when operating with older motors designs, or newer high efficiency designs.

Operation can be in simple V/F control mode or in High Performance Third Generation Vector Mode, which provides up to 200% torque from zero speed without requiring an encoder.

Permanent Magnet AC Motors

Permanent magnet AC motors provide improved efficiency compared to standard induction motors. Using permanent magnets in the motor construction eliminates the need for any magnetising current, reducing electrical losses. PM motors have been used for many years in high performance applications, however this has always required the use of a feedback device, such as a resolver or encoder. V-Drive AMC has been designed to operate with AC PM motors without requiring any feedback device, allowing them to be used for their energy efficiency benefits without incurring extra cost and complexity in applications which do not require position feedback.

Brushless DC Motors

BLDC motors are similar to AC PM motors, however the design requires a slightly different control method to optimise the performance. V-Drive AMC has the flexibility to control this type of motor, requiring only simple parameter changes. This provides much greater flexibility for OEMs, allowing V-Drive AMC to be used in a variety of applications, with various motor types.

Synchronous Reluctance Motors

Synchronous Reluctance Motors (SynRM), not to be confused with Switched Reluctance Motors, share a similar stator construction to standard induction motors, however the rotor is substantially different, in order to improve the overall efficiency of the motor. SynRM motors are ideally suited to variable torque applications.

V-Drive AMC can control synchronous reluctance motors, allowing the energy saving benefits to be realised.

V-DRIVE AMC

Replace # in model code with enclosure/display option

	Frame Size			kW	HP	Amps		kW Model Code										HP Model Code										IP20 LED Display	IP20 TFT Display	IP55 OLED Display	IP66 TFT Display	IP66 Switched TFT Display
	IP20	IP55	IP66					Product Range	Generation	Frame Size	Voltage Code	Power Rating	Supply Phases	Power Type	EMC Filter	Brake Transistor	Product Range	Generation	Frame Size	Voltage Code	Power Rating	Supply Phases	Power Type	EMC Filter	Brake Transistor							
200 – 240V ± 10% 1 Phase Input	2		2	0.75	1	4.3		AMC - 2 - 2 2 075 - 1 K F 4	#					AMC - 2 - 2 2 010 - 1 H F 4	#									2-SN			A-MN	B-MN				
	2		2	1.5	2	7		AMC - 2 - 2 2 150 - 1 K F 4	#					AMC - 2 - 2 2 020 - 1 H F 4	#									2-SN			A-MN	B-MN				
	2		2	2.2	3	10.5		AMC - 2 - 2 2 220 - 1 K F 4	#					AMC - 2 - 2 2 030 - 1 H F 4	#									2-SN			A-MN	B-MN				
200 – 240V ± 10% 3 Phase Input	2		2	0.75	1	4.3		AMC - 2 - 2 2 075 - 3 K F 4	#					AMC - 2 - 2 2 010 - 3 H F 4	#									2-SN			A-MN	B-MN				
	2		2	1.5	2	7		AMC - 2 - 2 2 150 - 3 K F 4	#					AMC - 2 - 2 2 020 - 3 H F 4	#									2-SN			A-MN	B-MN				
	2		2	2.2	3	10.5		AMC - 2 - 2 2 220 - 3 K F 4	#					AMC - 2 - 2 2 030 - 3 H F 4	#									2-SN			A-MN	B-MN				
	3		3	4	5	18		AMC - 2 - 3 2 040 - 3 K F 4	#					AMC - 2 - 3 2 050 - 3 H F 4	#									2-SN			A-MN	B-MN				
	3			5.5	7.5	24		AMC - 2 - 3 2 055 - 3 K F 4	#					AMC - 2 - 3 2 075 - 3 H F 4	#									2-SN								
		4		5.5	7.5	24		AMC - 2 - 4 2 055 - 3 K F 4	#					AMC - 2 - 4 2 075 - 3 H F 4	#											N-TN						
	4	4		7.5	10	30		AMC - 2 - 4 2 075 - 3 K F 4	#					AMC - 2 - 4 2 100 - 3 H F 4	#									2-MN	N-TN							
	4	4		11	15	46		AMC - 2 - 4 2 110 - 3 K F 4	#					AMC - 2 - 4 2 150 - 3 H F 4	#									2-MN	N-TN							
	5	5		15	20	60		AMC - 2 - 5 2 150 - 3 K F 4	#					AMC - 2 - 5 2 020 - 3 H F 4	#									2-MN	N-TN							
	5	5		18.5	25	72		AMC - 2 - 5 2 185 - 3 K F 4	#					AMC - 2 - 5 2 025 - 3 H F 4	#									2-MN	N-TN							
	6A	6		22	30	90		AMC - 2 - 6 2 022 - 3 K F 4	#					AMC - 2 - 6 2 030 - 3 H F 4	#									2-MN	N-TN							
	6A	6		30	40	110		AMC - 2 - 6 2 030 - 3 K F 4	#					AMC - 2 - 6 2 040 - 3 H F 4	#									2-MN	N-TN							
	6B	6		37	50	150		AMC - 2 - 6 2 037 - 3 K F 4	#					AMC - 2 - 6 2 050 - 3 H F 4	#									2-MN	N-TN							
	6B	6		45	60	180		AMC - 2 - 6 2 045 - 3 K F 4	#					AMC - 2 - 6 2 060 - 3 H F 4	#									2-MN	N-TN							
		7		55	75	202		AMC - 2 - 7 2 055 - 3 K F 4	#					AMC - 2 - 7 2 075 - 3 H F 4	#										N-TN							
		7		75	100	240		AMC - 2 - 7 2 075 - 3 K F 4	#					AMC - 2 - 7 2 100 - 3 H F 4	#										N-TN							
380 – 480V ± 10% 3 Phase Input	2		2	0.75	1	2.2		AMC - 2 - 2 4 075 - 3 K F 4	#					AMC - 2 - 2 4 010 - 3 H F 4	#									2-SN			A-MN	B-MN				
	2		2	1.5	2	4.1		AMC - 2 - 2 4 150 - 3 K F 4	#					AMC - 2 - 2 4 020 - 3 H F 4	#									2-SN			A-MN	B-MN				
	2		2	2.2	3	5.8		AMC - 2 - 2 4 220 - 3 K F 4	#					AMC - 2 - 2 4 030 - 3 H F 4	#									2-SN			A-MN	B-MN				
	2		2	4	5	9.5		AMC - 2 - 2 4 400 - 3 K F 4	#					AMC - 2 - 2 4 050 - 3 H F 4	#									2-SN			A-MN	B-MN				
	3		3	5.5	7.5	14		AMC - 2 - 3 4 055 - 3 K F 4	#					AMC - 2 - 3 4 075 - 3 H F 4	#									2-SN			A-MN	B-MN				
	3		3	7.5	10	18		AMC - 2 - 3 4 075 - 3 K F 4	#					AMC - 2 - 3 4 100 - 3 H F 4	#									2-SN			A-MN	B-MN				
	3			11	15	24		AMC - 2 - 3 4 110 - 3 K F 4	#					AMC - 2 - 3 4 150 - 3 H F 4	#								2-SN									
		4		11	15	24		AMC - 2 - 4 4 110 - 3 K F 4	#					AMC - 2 - 4 4 150 - 3 H F 4	#										N-TN							
	4	4		15	20	30		AMC - 2 - 4 4 150 - 3 K F 4	#					AMC - 2 - 4 4 200 - 3 H F 4	#									2-MN	N-TN							
	4	4		18.5	25	39		AMC - 2 - 4 4 185 - 3 K F 4	#					AMC - 2 - 4 4 250 - 3 H F 4	#									2-MN	N-TN							
	4	4		22	30	46		AMC - 2 - 4 4 220 - 3 K F 4	#					AMC - 2 - 4 4 300 - 3 H F 4	#									2-MN	N-TN							
	5	5		30	40	61		AMC - 2 - 5 4 300 - 3 K F 4	#					AMC - 2 - 5 4 040 - 3 H F 4	#									2-MN	N-TN							
	5	5		37	50	72		AMC - 2 - 5 4 370 - 3 K F 4	#					AMC - 2 - 5 4 050 - 3 H F 4	#									2-MN	N-TN							
	6A	6		45	60	90		AMC - 2 - 6 4 045 - 3 K F 4	#					AMC - 2 - 6 4 060 - 3 H F 4	#									2-MN	N-TN							
	6A	6		55	75	110		AMC - 2 - 6 4 055 - 3 K F 4	#					AMC - 2 - 6 4 075 - 3 H F 4	#									2-MN	N-TN							
	6B	6		75	100	150		AMC - 2 - 6 4 075 - 3 K F 4	#					AMC - 2 - 6 4 100 - 3 H F 4	#									2-MN	N-TN							
	6B	6		90	150	180		AMC - 2 - 6 4 090 - 3 K F 4	#					AMC - 2 - 6 4 150 - 3 H F 4	#									2-MN	N-TN							
	7		110	175	202		AMC - 2 - 7 4 110 - 3 K F 4	#					AMC - 2 - 7 4 175 - 3 H F 4	#										N-TN								
	7		132	200	240		AMC - 2 - 7 4 132 - 3 K F 4	#					AMC - 2 - 7 4 200 - 3 H F 4	#										N-TN								
	7		160	250	302		AMC - 2 - 7 4 160 - 3 K F 4	#					AMC - 2 - 7 4 250 - 3 H F 4	#										N-TN								
	8		200	300	370		AMC - 2 - 8 4 200 - 3 K F 4	#					AMC - 2 - 8 4 300 - 3 H F 4	#										2-MN								
	8		250	350	450		AMC - 2 - 8 4 250 - 3 K F 4	#					AMC - 2 - 8 4 350 - 3 H F 4	#										2-MN								
480 – 525V ± 10% 3 Phase Input		7		132	–	185		AMC - 2 - 7 5 132 - 3 K 0 4	#					–												N-TN						
		7		150	–	205		AMC - 2 - 7 5 150 - 3 K 0 4	#					–												N-TN						
		7		185	–	255		AMC - 2 - 7 5 185 - 3 K 0 4	#					–												N-TN						
		7		200	–	275		AMC - 2 - 7 5 200 - 3 K 0 4	#					–												N-TN						
500 – 600V ± 10% 3 Phase Input	2		2	0.75	1	2.1		AMC - 2 - 2 6 075 - 3 K 0 4	#					AMC - 2 - 2 6 010 - 3 H 0 4	#									2-SN			A-MN	B-MN				
	2		2	1.5	2	3.1		AMC - 2 - 2 6 150 - 3 K 0 4	#					AMC - 2 - 2 6 020 - 3 H 0 4	#									2-SN			A-MN	B-MN				
	2		2	2.2	3	4.1		AMC - 2 - 2 6 220 - 3 K 0 4	#					AMC - 2 - 2 6 030 - 3 H 0 4	#									2-SN			A-MN	B-MN				
	2		2	4	5	6.5		AMC - 2 - 2 6 400 - 3 K 0 4	#					AMC - 2 - 2 6 050 - 3 H 0 4	#									2-SN			A-MN	B-MN				
	2		2	5.5	7.5	9		AMC - 2 - 2 6 550 - 3 K 0 4	#					AMC - 2 - 2 6 075 - 3 H 0 4	#									2-SN			A-MN	B-MN				
	3		3	7.5	10	12		AMC - 2 - 3 6 075 - 3 K 0 4	#					AMC - 2 - 3 6 100 - 3 H 0 4	#									2-SN			A-MN	B-MN				
	3		3	11	15	17		AMC - 2 - 3 6 110 - 3 K 0 4	#					AMC - 2 - 3 6 150 - 3 H 0 4	#									2-SN			A-MN	B-MN				
	3			15	20	22		AMC - 2 - 3 6 150 - 3 K 0 4	#					AMC - 2 - 3 6 200 - 3 H 0 4	#									2-SN								
		4		15	20	22		AMC - 2 - 4 6 150 - 3 K 0 4	#					AMC - 2 - 4 6 200 - 3 H 0 4	#										N-TN							
	4	4		18.5	25	28		AMC - 2 - 4 6 185 - 3 K 0 4	#					AMC - 2 - 4 6 250 - 3 H 0 4	#										2-MN	N-TN						
	4	4		22	30	34		AMC - 2 - 4 6 220 - 3 K 0 4	#					AMC - 2 - 4 6 300 - 3 H 0 4	#										2-MN	N-TN						
	4	4		30	40	41		AMC - 2 - 4 6 300 - 3 K 0 4	#					AMC - 2 - 4 6 400 - 3 H 0 4	#										2-MN	N-TN						
	5	5		37	50	54		AMC - 2 - 5 6 370 - 3 K 0 4	#					AMC - 2 - 5 6 050 - 3 H 0 4	#										2-MN	N-TN						
	5	5		45	60	65		AMC - 2 - 5 6 450 - 3 K 0 4	#					AMC - 2 - 5 6 060 - 3 H 0 4	#										2-MN	N-TN						
		6		55	75	78		AMC - 2 - 6 6 055 - 3 K 0 4	#					AMC - 2 - 6 6 075 - 3 H 0 4	#										N-TN							
		6		75	100	105		AMC - 2 - 6 6 075 - 3 K 0 4	#					AMC - 2 - 6 6 100 - 3 H 0 4	#										N-TN							
		6		90	125	130		AMC - 2 - 6 6 090 - 3 K 0 4	#					AMC - 2 - 6 6 125 - 3 H 0 4	#										N-TN							
		6		110	150	150		AMC - 2 - 6 6 110 - 3 K 0 4	#					AMC - 2 - 6 6 150 - 3 H 0 4	#										N-TN							


kW Models: Factory Settings
Motor Rated Frequency: 50Hz
Motor Rated Voltage: 230/400/575V

HP Models: Factory Settings
Motor Rated Frequency: 60Hz
Motor Rated Voltage: 230/460/575V


Drive Specification

Input Ratings	Supply Voltage	200 – 240V ± 10% 380 – 480V ± 10% 500 – 600V ± 10%	Fieldbus Connectivity	Built-in	CANopen 125 – 1000kbps
	Supply Frequency	48 – 62Hz		Modbus RTU	9.6 – 115.2 kbps selectable 8N1, 8N2, 8E1, 8O1
	Displacement Power Factor	> 0.98		Optional	Other
	Phase Imbalance	3% Maximum allowed			PROFIBUS DP (DPV1) PROFINET IO DeviceNet EtherNet/IP EtherCAT Modbus TCP
	Inrush Current	< rated current			
	Power Cycles	120 per hour maximum, evenly spaced			
Output Ratings	Output Power	230V 1Ph. Input: 0.75–2.2kW (1–3HP) 230V 3Ph. Input: 0.75–75kW (1–100HP) 400V 3Ph. Input: 0.75–250kW 460V 3Ph. Input: 1–350HP 575V 3Ph. Input: 0.75–110kW (1–150HP)	I/O Specification	Power Supply	24 Volt DC, 100mA, Short Circuit Protected 10 Volt DC, 10mA for Potentiometer
	Overload Capacity	150% for 60 seconds		Programmable Inputs	5 Total as standard (Optional additional 3) 3 Digital (Optional additional 3) 2 Analog / Digital Selectable
	Output Frequency	0 – 500Hz, 0.1Hz resolution		Digital Inputs	Opto - Isolated 8 – 30 Volt DC, internal or external supply Response time < 4ms
	Acceleration Time	0.01 – 600 seconds		Analog Inputs	Resolution: 12 bits Response time: < 4ms Accuracy: < 1% full scale Parameter adjustable scaling and offset
	Deceleration Time	0.01 – 600 seconds		PTC Input	Motor PTC / Thermistor Input Trip Level: 3kΩ
	Typical Efficiency	> 98%		Programmable Outputs	4 Total (Optional additional 3) 2 Analog / Digital 2 Relays (Optional additional 3)
Ambient Conditions	Temperature	Storage: –40 to 60°C Operating: –10 to 50°C	Application Features	Relay Outputs	Maximum Voltage: 250 VAC, 30 VDC Switching Current Capacity: 5A AC, 5A DC
	Altitude	Up to 1000m ASL without derating Up to 2000m maximum UL Approved Up to 4000m maximum (non UL)		Analog Outputs	0 to 10 Volt 0 to 20mA 4 to 20mA
	Humidity	95% Max, non condensing			
	Vibration	Conforms to IEC 60068-2-6 Sinusoidal Vibration 10 – 57Hz @ 0.075mm Pk 57 – 150Hz @ 1g Pk			
Enclosure	Ingress Protection	IP20, IP55, IP66	Maintenance & Diagnostics	Fault Memory	Last 4 Trips stored with time stamp
Programming	Keypad	Built-in keypad as standard Optional remote mountable keypad		Data Logging	Logging of data prior to trip for diagnostic purposes: Output Current Drive Temperature DC Bus Voltage
	Display	Built-in multi language text display (IP55 & IP66) 7 Segment LED (IP20)		Maintenance Indicator	Maintenance Indicator with user adjustable maintenance interval Onboard service life monitoring
	PC	OptiTools Studio		Monitoring	Hours Run Meter Resettable & Non Resettable kWh meters Cooling Fan Run Time
Control Specification	Control Method	V/F Voltage Vector Energy Optimised V/F 3GV Sensorless Vector Speed Control 3GV Sensorless Vector Torque Control Closed Loop (Encoder) Speed Control Closed Loop (Encoder) Torque Control PM Vector Control BLDC Control Synchronous Reluctance	Standards Compliance	Low Voltage Directive	2014/35/EU
	PWM Frequency	4–32kHz Effective		EMC Directive	2014/30/EU
	Stopping Mode	Ramp to Stop: User Adjustable 0.01 – 600 secs Coast to Stop		Additional Conformance	UL, cUL, EAC, RCM
	Braking	Motor Flux Braking Built-in Braking Transistor		Marine Certification	DNV Type Approval
	Skip Frequency	Single point, user adjustable		Environmental Conditions	Designed to meet IEC 60721-3-3, in operation: IP20 Drives: 3S2/3C2 IP55 & 66 Drives: 3S3/3C3
	Setpoint Control	Analog Signal 0 to 10 Volts 10 to 0 Volts –10 to +10 Volts 0 to 20mA 20 to 0mA 4 to 20mA 20 to 4mA Digital Motorised Potentiometer (Keypad) Modbus RTU CANopen			

Model Code Guide

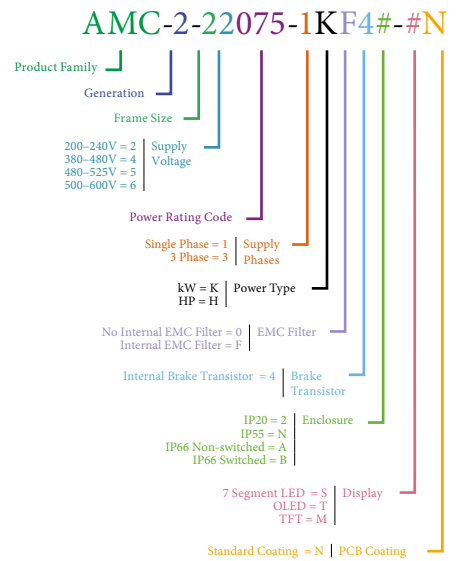

Connection Diagram

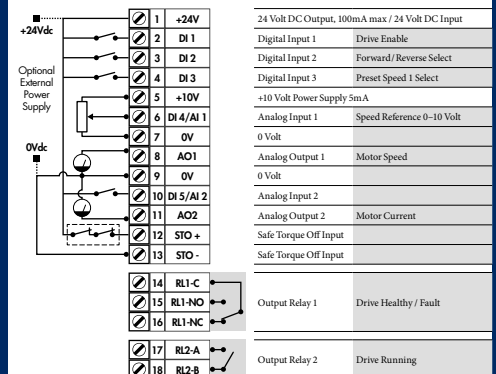

NOT TO SCALE

		IP20									IP66		IP55			
Size		2	3	4	5	6A	6B	8			2	3	4	5	6	7
mm	Height	221	261	418	486	614	726	995			257	310	450	540	865	1280
mm	Width	110	131	160	222	286	330	482			188	211	171	235	330	330
mm	Depth	185	205	240	260	320	320	480			239	266	252	270	330	360
kg	Weight	1.8	3.5	9.2	18.2	32	43	128			4.8	7.7	11.5	23	55	89

V-DRIVE GPD

General Purpose Drive

Easy to Use

General Purpose Drive

Focused on ease of use, V-Drive GPD provides unrivalled simplicity of installation, connection and commissioning, allowing the user to benefit from precise motor control and energy savings within minutes.



Simple Commissioning

With just 14 basic parameters and application macro functions providing rapid set up, V-Drive GPD minimises start-up time.



Intuitive Keypad Control

Precise digital control at the touch of a button.



Application Macros

Switch between Industrial, Pump & Fan modes to optimise V-Drive GPD for your application.

Industrial | Pump | Fan

IP20

Compact, robust and reliable general purpose drive for panel mounting

Up to 22kW

- ✓ Easy to use
- ✓ Compact & robust



Sensorless Vector Control for all Motor Types

IM

IE2 & IE3
Induction
Motors

PM

AC Permanent
Magnet Motors

BLDC

Brushless DC
Motors

SynRM

Synchronous
Reluctance
Motors

Precise and reliable control for
IE2, IE3 & IE4 motors

IP66 Outdoor

Up to 22kW

- ✓ Outdoor rated
- ✓ Dust-tight
- ✓ Washdown ready



Coated Heatsink as Standard

Ideal for hygiene based operations requiring washdown — such as food and beverage



IP66 / NEMA 4X



Key Features

- ✓ Internal Category C1 EMC filter
- ✓ Internal PI control
- ✓ Internal brake chopper
- ✓ Dual analogue inputs
- ✓ Operates up to 50°C
- ✓ Bluetooth® connectivity
- ✓ Option for control of single phase motors

Modbus
CANopen
on-board as standard

Internal Category C1 EMC Filter

An internal filter in every V-Drive GPD saves cost and time for installation.

Cat C1 according to EN61800-3:2004



Application Macros

Switch modes at the touch of a button to optimise V-Drive GPD for your application

Single parameter application macro selection



Industrial Mode

Industrial Mode optimises V-Drive GPD for load characteristics of typical industrial applications.

Applications include:

- ✓ Conveyors
- ✓ Mixers
- ✓ Treadmills

Sensorless Vector provides high starting torque and excellent speed regulation

IP20 panel mount units or IP66 for direct machine mounting



Rapid parameter cloning using OPTISTICK



Pump Mode

Pump Mode makes energy efficient pump control easier than ever.

Applications include:

- ✓ Dosing Pumps
- ✓ Borehole Pumps
- ✓ Transfer Pumps
- ✓ Swimming Pools
- ✓ Spas
- ✓ Fountains

- Constant or variable torque
- Internal PI control



Fan Mode

Fan Mode (inc. fire operation) makes air handling a breeze, ideal for simple HVAC systems.

Applications include:


- ✓ Air Handling Units
- ✓ Ventilation Fans
- ✓ Circulating Fans
- ✓ Air Curtains
- ✓ Kitchen Extract

- High efficiency variable torque motor control
- Flying start capability
- Mains loss ride through
- PI control



Instant Power Savings

The graph below shows the incredible efficiency of V-Drive GPD for controlling airflow compared to traditional damper control methods.



Modbus
CANopen

on-board as standard

V-DRIVE GPD

	kW	HP	Amps	Frame	Model Code	Product Family	Generation	Frame Size	Voltage Code	Output Current x 10	Supply Phases	EMC Filter	Basic Transistor	Enclosure Option
110 – 115V ± 10% 1 Phase Input	0.37	0.5	2.3	1	GPD - 3 - 1 - 1	1	0023	- 1	0	1	#			
	0.75	1	4.3	1	GPD - 3 - 1 - 1	1	0043	- 1	0	1	#			
	1.1	1.5	5.8	2	GPD - 3 - 2 - 1	1	0058	- 1	0	4	#			
200 – 240V ± 10% 1 Phase Input	0.37	0.5	2.3	1	GPD - 3 - 1 - 2	2	0023	- 1	#	1	#			
	0.75	1	4.3	1	GPD - 3 - 1 - 2	2	0043	- 1	#	1	#			
	1.5	2	7	1	GPD - 3 - 1 - 2	2	0070	- 1	#	1	#			
	1.5	2	7	2	GPD - 3 - 2 - 2	2	0070	- 1	#	4	#			
	2.2	3	10.5	2	GPD - 3 - 2 - 2	2	0105	- 1	#	4	#			
200 – 240V ± 10% 3 Phase Input	0.37	0.5	2.3	1	GPD - 3 - 1 - 2	2	0023	- 3	0	1	#			
	0.75	1	4.3	1	GPD - 3 - 1 - 2	2	0043	- 3	0	1	#			
	1.5	2	7	1	GPD - 3 - 1 - 2	2	0070	- 3	0	1	#			
	1.5	2	7	2	GPD - 3 - 2 - 2	2	0070	- 3	#	4	#			
	2.2	3	10.5	2	GPD - 3 - 2 - 2	2	0105	- 3	#	4	#			
380 – 480V ± 10% 3 Phase Input	0.75	1	2.2	1	GPD - 3 - 3 - 2	2	0180	- 3	#	4	#			
	4	5	18	3	GPD - 3 - 3 - 2	2	0180	- 3	#	4	#			
	5.5	7.5	24	3	GPD - 3 - 3 - 2	2	0240	- 3	#	4	#			
	7.5	10	30	4	GPD - 3 - 4 - 2	2	0300	- 3	#	4	#			
	11	15	46	4	GPD - 3 - 4 - 2	2	0460	- 3	#	4	#			

Replace # in model code with colour-coded option

Enclosure Types

A



IP66
Outdoor Use
Non-switched

B



IP66
Outdoor Use
Switched

2



IP20

EMC Filter

F

Internal EMC Filter

0

No Internal EMC Filter

IP20

Size	1	2	3	4
mm Height	173	221	261	420
mm Width	83	110	131	171
mm Depth	123	150	175	212
kg Weight	1.0	1.7	3.2	9.1
Fixings	4xM5	4xM5	4xM5	4xM8

IP66

Size	1	2	3	4
mm Height	232	257	310	360
mm Width	161	188	210.5	240
mm Depth	162	182	238	275
kg Weight	2.5	3.5	7.0	9.5
Fixings	4xM4	4xM4	4xM4	4xM4

Drive Specification

Input Ratings	Supply Voltage	110 – 115V ± 10% 200 – 240V ± 10% 380 – 480V ± 10%	Control Specification	Control Method	Sensorless Vector Speed Control PM Vector Control BLDC Control Synchronous Reluctance	Application Features	PI Control	Internal PI Controller Standby / Sleep Function	
	Supply Frequency	48 – 62Hz		PWM Frequency	4 – 32kHz Effective		Fire Mode	Bidirectional Selectable Speed Setpoint (Fixed / PI / Analog / Fieldbus)	
	Displacement Power Factor	> 0.98		Stopping Mode	Ramp to stop: User Adjustable 0.1 – 600 secs Coast to stop		Maintenance & Diagnostics		Last 4 Trips stored with time stamp
	Phase Imbalance	3% Maximum allowed		Braking	Motor Flux Braking Built-in braking transistor (not frame size 1)			Data Logging	Logging of data prior to trip for diagnostic purposes. Output Current Drive Temperature DC Bus Voltage
	Inrush Current	< rated current		Skip Frequency	Single point, user adjustable		Monitoring	Hours Run Meter	
	Power Cycles	120 per hour maximum, evenly spaced							
Output Ratings	Output Power	110V 1 Ph Input: 0.5 – 1.5HP (230V 3 Ph Output) 230V 1 Ph Input: 0.37–4kW (0.5–5HP) 230V 3 Ph Input: 0.37–11kW (0.5–15HP) 400V 3 Ph Input: 0.75–22kW 460V 3 Ph Input: 1–30HP	Setpoint Control	Analog Signal	0 to 10 Volts 10 to 0 Volts 0 to 20mA 20 to 0mA 4 to 20mA 20 to 4mA	Standards Compliance	Low Voltage Directive	Adjustable speed electrical power drive systems. EMC requirements	
	Overload Capacity	150% for 60 Seconds 175% for 2.5 seconds		Digital	Motorised Potentiometer (Keypad) Modbus RTU CANopen EtherNet/IP		EMC Directive	2014/30/EU Cat C1 according to EN61800-3:2004	
	Output Frequency	0 – 500Hz, 0.1Hz resolution					Machinery Directive	2006/42/EC	
	Acceleration Time	0.01 – 600 seconds	Fieldbus	Built-in	CANopen 125–1000 kbps Modbus RTU 9.6–115.2 kbps selectable		Conformance	CE, UL, RCM	
	Deceleration Time	0.01 – 600 seconds							
	Typical Efficiency	> 98%	I/O Specification	Power Supply	24 Volt DC, 100mA, Short Circuit Protected 10 Volt DC, 10mA for Potentiometer				
Ambient Conditions	Temperature	Storage: –40 to 60°C Operating: –20 to 50°C	Programmable Inputs	4 Total 2 Digital 2 Analog / Digital selectable					
	Altitude	Up to 1000m ASL without derating Up to 2000m maximum UL approved Up to 4000m maximum (non UL)	Digital Inputs	8 – 30 Volt DC, internal or external supply Response time < 4ms					
	Humidity	95% Max, non condensing	Analog Inputs	Resolution: 12 bits Response time: < 4ms Accuracy: ± 2% full scale Parameter adjustable scaling and offset					
	Vibration	Conforms to EN61800-5-1							
Enclosure	Ingress Protection	IP20, IP66	Programmable Outputs	2 Total 1 Analog / Digital 1 Relay					
Programming	Keypad	Built-in keypad as standard Optional remote mountable keypad	Relay Outputs	Maximum Voltage: 250 VAC, 30 VDC Switching Current Capacity: 6A AC, 5A DC					
	Display	7 Segment LED	Analog Outputs	0 to 10 Volt					
	PC	OptTools Studio							

V-DRIVE GDP1

For Single Phase Motors

IP20

IP66

Up to 1.1kW

Single Phase Motor
Control for PSC &
Shaded-Pole Motors

Key Features

- ✓ 110 – 115V and 200 – 240V models
- ✓ Small mechanical envelope
- ✓ Rugged industrial operation
- ✓ Fast setup, and simple operation with 14 basic parameters
- ✓ Unique motor control strategy optimised for single phase motors
- ✓ Motor current and rpm indication
- ✓ Built in PI control, EMC filter (C1) & brake chopper
- ✓ Application macros for industrial, fan and pump operation
- ✓  Bluetooth® connectivity

Modbus
CANopen

on-board as standard

150% overload for 60 secs
(175% for 2 secs)



Pump control in
swimming pools & spas



Simple airflow control

Dedicated to Single Phase Motor Control


Designed to be cost effective and easy to use, the V-Drive GDP1 for Single Phase Motors is for use with PSC (Permanent Split Capacitor) or Shaded-Pole Single Phase induction motors.

V-Drive GDP1 for Single Phase Motors uses a revolutionary motor control strategy to achieve reliable intelligent starting of single phase motors.

- Removes the need for 3 phase supply wiring
- Provides the same performance features as the 3 phase V-Drive GDP1
- The ideal energy saving solution where high starting torque is not required — typically including fans, blowers, centrifugal pumps, fume extractors and air flow controllers

Special Boost Phase

To ensure reliable starting of single phase motors, the drive initially ramps the motor voltage up to rated voltage whilst maintaining a fixed starting frequency, before reducing the frequency and voltage to the desired operating point.

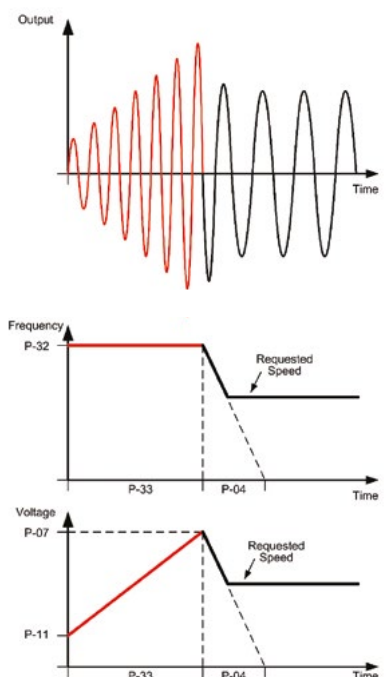


V-DRIVE GPD₁

For Single Phase Motors

	kW				Model Code							
	0.37	0.5	7	1	Product Family	Generation	Frame Size	Voltage Code	Capacity	Supply Phases	EMC Filter	Brake Transistor
110 – 115V ± 10% 1 Phase Input	0.37	0.5	7	1	GPD1 - 3 - 1	1	0070	- 1	#	1	#	- 01
	0.55	0.75	10.5	2	GPD1 - 3 - 2	1	0105	- 1	#	4	#	- 01
200 – 240V ± 10% 1 Phase Input	0.37	0.5	4.3	1	GPD1 - 3 - 1	2	0043	- 1	#	1	#	- 01
	0.75	1	7	1	GPD1 - 3 - 1	2	0070	- 1	#	1	#	- 01
	1.1	1.5	10.5	2	GPD1 - 3 - 2	2	0105	- 1	#	4	#	- 01

Model Code Guide:

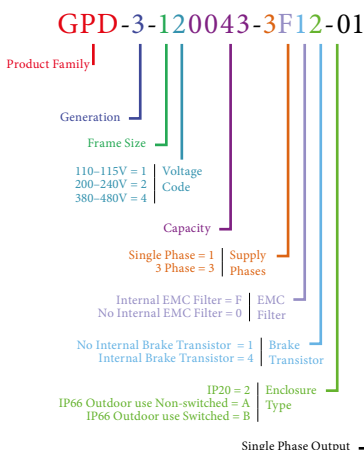

Replace # in model code with colour-coded option

Enclosure Types

A		IP66 Outdoor Use Non-switched
B		IP66 Outdoor use Switched
2		IP20

EMC Filter

F	Internal EMC Filter
0	No Internal EMC Filter

IP20

Size		1	2
mm	Height	173	221
mm	Width	83	110
mm	Depth	123	150
kg	Weight	1.0	1.7
	Fixings	4xM5	4xM5

IP66

Size		1	2
mm	Height	232	257
mm	Width	161	188
mm	Depth	162	182
kg	Weight	2.5	3.5
	Fixings	4xM4	4xM4

Drive Specification

Input Ratings	Supply Voltage	110 – 115V ± 10% 200 – 240V ± 10%
	Supply Frequency	48 – 62Hz
Output Ratings	Displacement Power Factor	> 0.98
	Phase Imbalance	3% Maximum allowed
Ambient Conditions	Inrush Current	< rated current
	Power Cycles	120 per hour maximum, evenly spaced
Enclosure	Output Power	110V 1 Ph Input: 0.5–0.75HP 230V 1 Ph Input: 0.37–1.1kW (0.5–1.5HP)
	Overload Capacity	150% for 60 Seconds 175% for 2.5 seconds
Programming	Output Frequency	0 – 500Hz, 0.1Hz resolution
	Acceleration Time	0.01 – 600 seconds
Control Specification	Deceleration Time	0.01 – 600 seconds
	Typical Efficiency	> 98%
I/O Specification	Temperature	Storage: –40 to 60°C Operating: –20 to 50°C
	Altitude	Up to 1000m ASL without derating Up to 2000m maximum UL approved Up to 4000m maximum (non UL)
Fieldbus	Humidity	95% Max, non condensing
	Vibration	Conforms to EN61800-5-1
Application Features	Ingress Protection	IP20, IP66
	Control Method	V/F Voltage Energy Optimised V/F
Maintenance & Diagnostics	PWM Frequency	4–32kHz Effective
	Stopping Mode	Ramp to stop: User Adjustable 0.1 – 600 secs Coast to stop
Standards Compliance	Braking	Motor Flux Braking Built-in braking transistor (frame size 2)
	Skip Frequency	Single point, user adjustable
Conformance	Setpoint Control	Analog Signal 0 to 10 Volts 10 to 0 Volts 0 to 20mA 20 to 0mA 4 to 20mA 20 to 4mA Digital Motorised Potentiometer (Keypad) Modbus RTU CANopen EtherNet/IP
	Built-in	CANopen 125–1000 kbps Modbus RTU 9.6–115.2 kbps selectable
Fault Mode	Power Supply	24 Volt DC, 100mA, Short Circuit Protected 10 Volt DC, 10mA for Potentiometer
	Programmable Inputs	4 Total 2 Digital 2 Analog / Digital selectable
Data Logging	Digital Inputs	8 – 30 Volt DC, internal or external supply Response time < 4ms
	Analog Inputs	Resolution: 12 bits Response time: < 4ms Accuracy: ± 2% full scale Parameter adjustable scaling and offset
Monitoring	Programmable Outputs	2 Total 1 Analog / Digital 1 Relay
	Relay Outputs	Maximum Voltage: 250 VAC, 30 VDC Switching Current Capacity: 6A AC, 5A DC
Hours Run Meter	Analog Outputs	0 to 10 Volt
	Low Voltage Directive	Adjustable speed electrical power drive systems. EMC requirements
EMC Directive	EMC Directive	2014/30/EU 230V 1Ph, Filtered Units : Cat C1 according to EN61800-3:2004
	Machinery Directive	2006/42/EC
Conformance	CE, UL, RCM	

V-DRIVE EPC

Energy Efficient Pump Control

AC Variable Speed Drive

0.75 – 250kW / 1 – 350HP

200 – 600V Single & 3 Phase Input

Energy Efficient Fan & Pump Control

AC Induction (IM) Motors

AC Permanent Magnet (PM) Motors

Brushless DC (BLDC) Motors

Synchronous Reluctance (SynRM) Motors



Key Features

ECO Vector Motor Control



Energy Optimised Design



Internal EMC Filter



Low Noise Operation





IP55 / NEMA 12



IP66 / NEMA 4X



Save Energy

Accurate speed control of fans and pumps provides the most energy efficient control method

Energy optimisation function minimises energy usage in real time under partial load conditions

Sleep & wake functions ensure operation only when required

Save Money

Advanced on-board features remove the need for peripheral equipment

Intelligent maintenance interval timing allows programmable maintenance reminders, avoiding costly downtime

Automatic load monitoring provides an early warning of potential faults, such as belt failures or blocked filters

Save Time

Built in keypad and OLED text display provides intuitive operation

Simple parameter structure with carefully selected default values reduce commissioning time

Practical design allows easy access to power and control terminals without specialist tools

Fire Override Mode

Fire override mode ignores signals and alarms, keeping the drive operating for as long as possible.

This feature is crucial for ensuring smoke extraction from buildings in the event of a fire.

Selectable Normally Open or Normally Closed logic means that the V-Drive EPC can be easily configured to the signal produced by your fire management system.

With an independently set speed for fire mode operation, selectable as either forward or reverse direction, the V-Drive EPC has the flexibility to match the needs of your fire control system.

Improved Fan Efficiency

Unique Eco Vector Sensorless Control

V-Drive EPC uses advanced motor control, designed to provide the most energy efficient motor control possible. Operation with standard IM Motors, Permanent Magnet or Synchronous Reluctance motors is possible, all without requiring any feedback device or optional modules – simply change parameters to suit the connected motor, autotune and operate!

Eco Vector continuously adjusts in real time to provide the most efficient operating conditions for the load, typically reducing energy consumption by 2 – 3% compared to standard AC drives – providing similar long term costs savings to selecting a higher efficiency motor.

Energy Optimised Design

V-Drive EPC up to frame size 5 are designed with film capacitors, replacing the traditional electrolytic capacitors used in the DC link. Film capacitors have lower losses, and also remove the need for AC, DC or swinging chokes, improving overall drive efficiency. Efficiency is improved by up to 4% compared to standard AC drives, whilst also reducing supply current total harmonic distortion (iTHD), improving the Real Power Factor and reducing total input current, leading to cost savings on installation through reduced cable and fuse ratings and smaller supply transformer rating.

PID Control

V-Drive EP has a PID controller built in that is fully integrated with both HVAC and energy efficient features and is packaged in a user friendly way to ensure ease of use and fast commissioning.

V-DRIVE EPC

Energy Efficient Pump Control

OPTIFLOW™

Co-ordinated pump station control, built into each drive as standard, allows independent control of multiple pump applications.

- ... All pumps operate as variable speed for maximum energy saving.
- ... Equal run time sharing across every pump.
- ... Automatic system reconfiguration in the event of a pump fault (including the master pump).
- ... Continued system operation when drives are individually powered off (including the master drive).
- ... Communication and +24V control voltage shared between drives via a standard RJ45 patch lead.
- ... Independent maintenance indicators for each pump.
- ... Any pump can be switched to Hand operation at the touch of a button, and will automatically rejoin the network when switched back to Auto.
- ... For waste water applications each pump can be set for blockage/ragging detection and activate an automatic de-ragging/pump cleaning cycle.
- ... Optional mains isolator with lock-off for safe pump maintenance.
- ... Optiflow function configured through simple parameter set-up and intelligent drive self configuration.

Setpoint Control

OPTIFLOW™

A standard feature on every Optidrive Eco

Independent pump system control

OptiFlow Communications

© Feedback signal



See **OPTIFLOW™** in action

Scan to watch the video or visit
<http://youtu.be/9QQ89bQYdfs>





Pump Efficiency

In-built Sleep Mode with Auto-boost

Sleep mode saves energy by detecting when a pump is running inefficiently and producing little useful work. V-Drive EPC can be programmed to enter into a sleep/disabled mode until the demand increases. To help prevent sleep mode oscillation, V-Drive EPC can automatically initiate a boost cycle to increase pressure on starting or stopping.

Drive Controlled Bypass

Intelligent features within the V-Drive EPC allow a bypass circuit to be implemented. Activation of Bypass mode can be determined intelligently by the V-Drive EPC drive based on a command from the building management system. The drive can be set to automatically select bypass mode when entering into a trip condition ensuring minimal disruption to service.

Avoid Pump Downtime

Blockage Detect/Clear

V-Drive EPC can detect potential pump blockages in real time and trigger a programmed cleaning cycle to automatically clear them, preventing downtime.


Pump Clean/Stir Cycle

Triggered by a settable period of inactivity, a configurable cleaning cycle can be run to clear sediment, ensuring the pump is ready to run when needed.

Dry Run Protection

V-Drive EPC can evaluate a pump's speed/power and shut it off or warn when the pump starts to run dry, protecting it from heat/friction damage.

Cascade Control Pump Staging

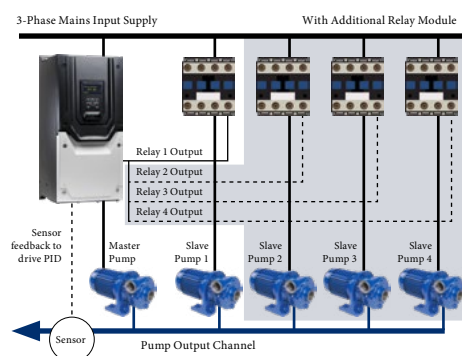

Variable speed duty pump with up to 4 assist pumps

V-Drive EPC can provide automatic operating time monitoring and balancing for assist pumps to share duty cycle. Run time clocks for all fixed speed assist pumps are maintained and visible within the V-Drive EPC for integration into the pump system maintenance schedules.

Motor Preheat Function

V-Drive EPC features a motor preheat function to help ensure moisture is not permitted to collect on the motor in periods of inactivity and prior to motor start up. In addition, the motor preheat function can be used to keep condensation from developing on the motor as the motor cools down immediately following a stop. The feature is fully configurable, meaning the pump can be always available the instant it is required.

V-DRIVE EPC

Replace # in model code with enclosure/display option


	Frame Size			kW	HP	Amps		Model Code	Product Family	Generation	Frame Size	Voltage Code	Output Rating	Supply Phases	EPC Filter	Quadrant	IP20 LED Display	IP20 TFT Display	IP55 OLED Display	IP66 TFT Display	IP66 TFT Display with Disconnect	
	IP20	IP55	IP66																			
200 – 240V ± 10% 1 Phase Input	2		2	0.75	1	4.3		EPC - 3 - 2 - 2	2	0043	- 1	F 1	#				2-SN			A-MN	E-MN	
	2		2	1.5	2	7		EPC - 3 - 2 - 2	2	0070	- 1	F 1	#				2-SN			A-MN	E-MN	
	2		2	2.2	3	10.5		EPC - 3 - 2 - 2	2	0105	- 1	F 1	#				2-SN			A-MN	E-MN	
200 – 240V ± 10% 3 Phase Input	2		2	0.75	1	4.3		EPC - 3 - 2 - 2	2	0043	- 3	F 1	#				2-SN			A-MN	E-MN	
	2		2	1.5	2	7		EPC - 3 - 2 - 2	2	0070	- 3	F 1	#				2-SN			A-MN	E-MN	
	2		2	2.2	3	10.5		EPC - 3 - 2 - 2	2	0105	- 3	F 1	#				2-SN			A-MN	E-MN	
	3		3	4	5	18		EPC - 3 - 3 - 2	2	0180	- 3	F 1	#				2-SN			A-MN	E-MN	
	3		3	5.5	7.5	24		EPC - 3 - 3 - 2	2	0240	- 3	F 1	#				2-SN			A-MN	E-MN	
	4	4		7.5	10	30		EPC - 3 - 4 - 2	0300	- 3	F 1	#					2-MN	N-TN				
	4	4		11	15	46		EPC - 3 - 4 - 2	0460	- 3	F 1	#					2-MN	N-TN				
	5	5		15	20	61		EPC - 3 - 5 - 2	0610	- 3	F 1	#					2-MN	N-TN				
	5	5		18.5	25	72		EPC - 3 - 5 - 2	0720	- 3	F 1	#					2-MN	N-TN				
	5	5		22	30	90		EPC - 3 - 5 - 2	0900	- 3	F 1	#					2-MN	N-TN				
	6A	6		30	40	110		EPC - 3 - 6 - 2	1100	- 3	F 1	#					2-MN	N-TN				
	6A	6		37	50	150		EPC - 3 - 6 - 2	1500	- 3	F 1	#					2-MN	N-TN				
	6B	6		45	60	180		EPC - 3 - 6 - 2	1800	- 3	F 1	#					2-MN	N-TN				
	6B			55	75	202		EPC - 3 - 6 - 2	2020	- 3	F 1	#					2-MN					
		7		55	75	202		EPC - 3 - 7 - 2	2020	- 3	F 1	#						N-TN				
		7		75	100	240		EPC - 3 - 7 - 2	2400	- 3	F 1	#							N-TN			
380 – 480V ± 10% 3 Phase Input	2		2	0.75	1	2.2		EPC - 3 - 2 - 4	0022	- 3	F 1	#				2-SN			A-MN	E-MN		
	2		2	1.5	2	4.1		EPC - 3 - 2 - 4	0041	- 3	F 1	#				2-SN			A-MN	E-MN		
	2		2	2.2	3	5.8		EPC - 3 - 2 - 4	0058	- 3	F 1	#				2-SN			A-MN	E-MN		
	2		2	4	5	9.5		EPC - 3 - 2 - 4	0095	- 3	F 1	#				2-SN			A-MN	E-MN		
	3		3	5.5	7.5	14		EPC - 3 - 3 - 4	0140	- 3	F 1	#				2-SN			A-MN	E-MN		
	3		3	7.5	10	18		EPC - 3 - 3 - 4	0180	- 3	F 1	#				2-SN			A-MN	E-MN		
	3		3	11	15	24		EPC - 3 - 3 - 4	0240	- 3	F 1	#				2-SN			A-MN	E-MN		
	4	4		15	20	30		EPC - 3 - 4 - 4	0300	- 3	F 1	#					2-MN	N-TN				
	4	4		18.5	25	39		EPC - 3 - 4 - 4	0390	- 3	F 1	#					2-MN	N-TN				
	4	4		22	30	46		EPC - 3 - 4 - 4	0460	- 3	F 1	#					2-MN	N-TN				
	5	5		30	40	61		EPC - 3 - 5 - 4	0610	- 3	F 1	#					2-MN	N-TN				
	5	5		37	50	72		EPC - 3 - 5 - 4	0720	- 3	F 1	#					2-MN	N-TN				
	5	5		45	60	90		EPC - 3 - 5 - 4	0900	- 3	F 1	#					2-MN	N-TN				
	6A	6		55	75	110		EPC - 3 - 6 - 4	1100	- 3	F 1	#					2-MN	N-TN				
	6A	6		75	100	150		EPC - 3 - 6 - 4	1500	- 3	F 1	#					2-MN	N-TN				
	6B	6		90	150	180		EPC - 3 - 6 - 4	1800	- 3	F 1	#					2-MN	N-TN				
	6B			110	175	202		EPC - 3 - 6 - 4	2020	- 3	F 1	#					2-MN					
		7		110	175	202		EPC - 3 - 7 - 4	2020	- 3	F 1	#						N-TN				
		7		132	200	240		EPC - 3 - 7 - 4	2400	- 3	F 1	#						N-TN				
		7		160	250	302		EPC - 3 - 7 - 4	3020	- 3	F 1	#						N-TN				
8			200	300	370		EPC - 3 - 8 - 4	3700	- 3	F 1	#						2-MN					
8			250	350	450		EPC - 3 - 8 - 4	4500	- 3	F 1	#						2-MN					
500 – 600V ± 10% 3 Phase Input	2		2	0.75	1	2.1		EPC - 3 - 2 - 6	0021	- 3	0 1	#				2-SN			A-MN	E-MN		
	2		2	1.5	2	3.1		EPC - 3 - 2 - 6	0031	- 3	0 1	#				2-SN			A-MN	E-MN		
	2		2	2.2	3	4.1		EPC - 3 - 2 - 6	0041	- 3	0 1	#				2-SN			A-MN	E-MN		
	2		2	4	5	6.5		EPC - 3 - 2 - 6	0065	- 3	0 1	#				2-SN			A-MN	E-MN		
	2		2	5.5	7.5	9		EPC - 3 - 2 - 6	0090	- 3	0 1	#				2-SN			A-MN	E-MN		
	3		3	7.5	10	12		EPC - 3 - 3 - 6	0120	- 3	0 1	#				2-SN			A-MN	E-MN		
	3		3	11	15	17		EPC - 3 - 3 - 6	0170	- 3	0 1	#				2-SN			A-MN	E-MN		
	3		3	15	20	22		EPC - 3 - 3 - 6	0220	- 3	0 1	#				2-SN						
		4		15	20	22		EPC - 3 - 4 - 6	0220	- 3	0 1	#						N-TN				
	4	4		18.5	25	28		EPC - 3 - 4 - 6	0280	- 3	0 1	#					2-MN	N-TN				
	4	4		22	30	34		EPC - 3 - 4 - 6	0340	- 3	0 1	#					2-MN	N-TN				
	4	4		30	40	43		EPC - 3 - 4 - 6	0430	- 3	0 1	#					2-MN	N-TN				
	5	5		37	50	54		EPC - 3 - 5 - 6	0540	- 3	0 1	#					2-MN	N-TN				
	5	5		45	60	65		EPC - 3 - 5 - 6	0650	- 3	0 1	#					2-MN	N-TN				
		6		55	75	78		EPC - 3 - 6 - 6	0780	- 3	0 1	#						N-TN				
		6		75	100	105		EPC - 3 - 6 - 6	1050	- 3	0 1	#						N-TN				
		6		90	125	130		EPC - 3 - 6 - 6	1300	- 3	0 1	#						N-TN				
		6		110	150	150		EPC - 3 - 6 - 6	1500	- 3	0 1	#						N-TN				

Drive Specification


Input Ratings	Supply Voltage	200 – 240V ± 10% 380 – 480V ± 10% 500 – 600V ± 10%
	Supply Frequency	48 – 62Hz
	Displacement Power Factor	> 0.98
	Phase Imbalance	3% Maximum allowed
	Inrush Current	< rated current
	Power Cycles	120 per hour maximum, evenly spaced
Output Ratings	Output Power	230V 1Ph. Input: 0.75–2.2kW (1–3HP) 230V 3Ph. Input: 0.75–75kW (1–100HP) 400V 3Ph. Input: 0.75–250kW 460V 3Ph. Input: 1–350HP 575V 3Ph. Input: 0.75–110kW (1–150HP)
	Overload Capacity	110% for 60 seconds 165% for 4 seconds
	Output Frequency	0 – 250Hz, 0.1Hz resolution
	Typical Efficiency	> 98%
Ambient Conditions	Temperature	Storage: –40 to 60°C Operating: –10 to 50°C
	Altitude	Up to 1000m ASL without derating Up to 2000m maximum UL approved Up to 4000m maximum (non UL)
	Humidity	95% Max, non condensing
	Vibration	Conforms to EN61800-5-1:2007, IEC 60068-2-6
Enclosure	Ingress Protection	IP20, IP55, IP66
Programming	Keypad	Built-in keypad as standard Optional remote mountable keypad
	Display	Built-in multi language text display (IP55 & IP66) 7 Segment LED (IP20)
	PC	OptiTools Studio
Control Specification	Control Method	Eco Sensorless Vector Open Loop Permanent Magnet Vector Open Loop BLDC Vector Open Loop Synchronous Reluctance Vector
	PWM Frequency	4 – 32kHz Effective
	Stopping Mode	Ramp to stop: User Adjustable 0.1 – 600 secs Coast to stop
	Braking	AC Flux Braking
	Skip Frequency	Single point, user adjustable
	Setpoint Control	Analog Signal 0 to 10 Volts / 10 to 0 Volts –10 Volts to +10 Volts 0 to 20mA / 20 to 0mA 4 to 20mA / 20 to 4mA
		Digital Motorised Potentiometer (Keypad) Modbus RTU BACnet MS/TP
Fieldbus Connectivity	Built-in	BACnet MS/TP BACnet Application Specific Controller 9.6 – 76.8 kbps selectable Data Format: 8N1, 8N2, 8O1, 8E1
		Modbus RTU 9.6 – 115.2 kbps selectable Data Format: 8N1, 8N2, 8O1, 8E1
	Optional	BACnet/IP Plug-in BACnet/IP interface Dual LAN ports Device Level Ring
		PROFIBUS DP (DPV1) PROFINET IO DeviceNet EtherNet/IP EtherCAT Modbus TCP

I/O Specification	Power Supply	24 Volt DC, 100mA, Short Circuit Protected 10 Volt DC, 10mA for Potentiometer
	Programmable Inputs	5 Total as standard (optional additional 3) 3 Digital (optional additional 3) 2 Analog / Digital selectable
	Digital Inputs	Opto - Isolated 8 – 30 Volt DC, internal or external supply Response time < 4ms
	Analog Inputs	Resolution: 12 bits Response time: < 4ms Accuracy: < 1% full scale Parameter adjustable scaling and offset
	PTC Input	Motor PTC / Thermistor Input Trip Level: 3kΩ
	Programmable Outputs	2 Total 1 Analog / Digital 1 Relay
	Relay Outputs	Maximum Voltage: 250 VAC, 30 VDC Switching Current Capacity: 5A
Analog Outputs		0 to 10 Volts / 10 to 0 Volts 0 to 20mA / 20 to 0mA 4 to 20mA / 20 to 4mA
Application Features	PID Control	Internal PID Controller Multi-setpoint Select Standby / Sleep Mode Boost Function
	Fire Mode	Bidirectional Selectable Speed Setpoint (Fixed / PID / Analog / Fieldbus)
	Load Monitoring	High Current Protection (Fan / Pump Blocked) Low Current Protection (Broken Belt / Shaft) Pump Blockage Detection with Cleaning
	Duty / Assist / Standby	Built-in Multi-Pump Support Automatic Changeover on Fault Automatic Changeover on Time Fully Redundant
Pump Control Features	Pump Blockage Detection	Pump load monitoring with autotune function, user configurable
	Pump Cleaning	Adjustable Bi-directional Pump Cleaning Cycle operation
	Multi-Pump Control	Control of fixed speed assist pumps (with cascade control module) Control of Duty, Assist and Standby variable speed pumps via internal Master – Slave network
	Pump Stir	Automatic pump stir to prevent sediment build-up
Maintenance & Diagnostics	Fault Memory	Last 4 Trips stored with time stamp
	Data Logging	Logging of data prior to trip for diagnostic purposes: Output Current Drive Temperature DC Bus Voltage
	Maintenance Indicator	Maintenance Indicator with user adjustable maintenance interval Onboard service life monitoring
	Monitoring	Hours Run Meter Resettable & Non-Resettable kWh meters Cooling Fan Run Time
Standards Compliance	Low Voltage Directive	2014/35/EU
	EMC Directive	2014/30/EU
	Additional Conformance	UL, cUL, EAC, RCM
	Harmonic Currents	IEC61000-3-12
	Environmental Conditions	Designed to meet IEC 60721-3-3, in operation: IP20 Drives: 3S2/3C2 IP55 & 66 Drives: 3S3/3C3

Model Code Guide

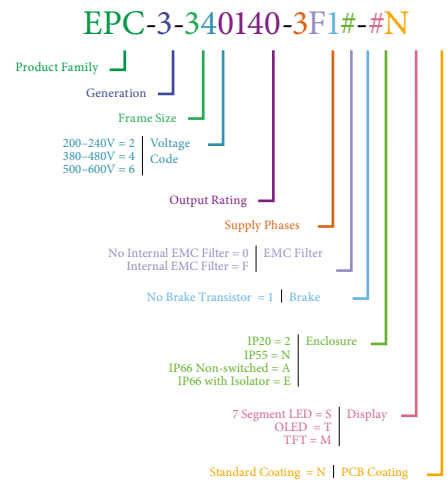

Connection Diagram

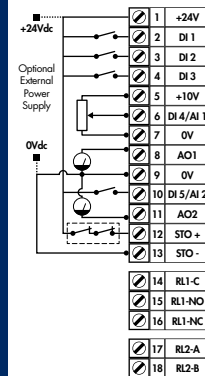

Function	Default Setting
24 Volt DC Output, 100mA max / 24 Volt DC Input	
Digital Input 1	Drive Enable
Digital Input 2	Analog / Preset Speed 1 Select
Digital Input 3	Local / Remote Reference Select
+10 Volt Power Supply 5mA	
Analog Input 1	Local Speed Reference
0 Volt	
Analog Output 1	Motor Speed
0 Volt	
Analog Input 2	Remote Speed Reference
Analog Output 2	Motor Current
Safe Torque Off Input	
Safe Torque Off Input	
Output Relay 1	Drive Healthy / Fault
Output Relay 2	Drive Running

NOT TO SCALE

		IP20									IP66		IP55				
Size		2	3	4	5	6A	6B	8			2	3	4	5	6	7	
mm	Height	221	261	418	486	614	726	995			257	310	450	540	865	1280	
mm	Width	110	131	160	222	286	330	482			188	211	171	235	330	330	
mm	Depth	185	205	240	260	320	320	480			239	266	252	270	330	360	
kg	Weight	1.8	3.5	8.1	17	32	43	128			4.8	7.7	11.5	23	55	89	

V-DRIVE EPC Size 8

200 – 250kW / 300 – 350HP
380 – 480V

High Power Drive Module

Optidrive Frame Size 8 extends the power rating capacity of Optidrive P2 and Optidrive Eco products up to 250kW / 350HP.

Combining all the features of the standard products, and providing the ability to control motors with rated current up to 450Amps, Frame Size 8 is available as an IP20 chassis unit suitable for control cabinet mounting.

Optional accessories include an EMC filter to meet Category C2, along with a range of input line chokes and output chokes.



V-Drive AMC

	kW	HP	Amps	Model Code	Product Family	Generation	Frame Size	Voltage Code	Power Rating Code	Supply Phases	Power Type	EMC Filter	Brake Transistor	Enclosure	Display	PCB Coating
380 – 480V ± 10% 3 Phase Input	200	300	370	AMC - 2 - 8 4	200 - 3	K F 4	2 - T N									
	250	350	450	AMC - 2 - 8 4	250 - 3	K F 4	2 - T N									
				AMC - 2 - 8 4	300 - 3	H F 4	2 - T N									
				AMC - 2 - 8 4	350 - 3	H F 4	2 - T N									

V-Drive EPC

	kW	HP	Amps	Model Code	Product Family	Generation	Frame Size	Voltage Code	Capacity	Supply Phases	Power Type	EMC Filter	1 Quadrant	Enclosure Type
380 – 480V ± 10% 3 Phase Input	200	300	370	EPC - 3 - 8 4	3700 - 3	F 1 2								
	250	350	450	EPC - 3 - 8 4	4500 - 3	F 1 2								

Size 8 Drive Specification

Input Ratings	Supply Voltage	380 – 480V ± 10%	Ambient Conditions	Temperature	Storage: –40 to 60°C Operating: –10 to 40°C
	Supply Frequency	48 – 62Hz		Altitude	Up to 1000m ASL without derating Up to 4000m maximum
	Displacement Power Factor	> 0.98		Humidity	95% Max, non condensing
	Phase Imbalance	3% Maximum allowed		Enclosure	Ingress Protection IP20
	Inrush Current	< rated current		Programming	Keypad Built-in keypad as standard Optional remote mountable keypad Display Built-in multi language OLED display PC OptiTools Studio
	Power Cycles	120 per hour maximum, evenly spaced		Standards Compliance	Low Voltage Directive 2014/35/EU EMC Directive 2014/30/EU Additional Conformance UL, cUL, EAC, RCM Harmonic Currents Eco: IEC61000-3-12
Output Ratings	Output Power	400V 3Ph. Input: 200 & 250kW 460V 3Ph. Input: 300 & 350HP			
	Overload Capacity	P2: 150% for 60 seconds Eco: 110% for 60 seconds			
	Output Frequency	0 – 120Hz, 0.1Hz resolution			
	Typical Efficiency	> 97%			

Options Include

OPT-2-L31500-00	Frame Size 8 AC Line Choke 500A, 1%
OPT-2-M3500-00	Frame Size 8 Output Choke 500A
OPT-2-L3500-00	Frame Size 8 AC Line Choke 500A, 4%
OPT-2-E3500-00	Frame Size 8 EMC Filter

Size	8
mm Height	995
mm Width	482
mm Depth	480
kg Weight	128



Keypads & Displays

OPTIPOINT 2

Remote Keypad & LED Display

OPT-2-OPOINT-



OPTIPAD

Remote Keypad & TFT Display



Optipad Language Support

OPT-3-OPPAD-IN

English

German

Spanish

Italian

French

Swedish

Russian

Polish

Portuguese

Finnish

OPT-3-OPPAD-TU

English

German

Turkish

Optiport 2 and Optipad units act as the remote keypad and display for the Optidrive on the network which has the same serial address. The physical layout and the operation of the Optiport keypad and display mimic the Optidrive exactly.

Specification

- ... Simple plug in RJ45 connection
- ... 24 Volt DC Power provided directly by the Optidrive
- ... RS485 2 Wire Signal Interface
- ... Operating Temperature:
-10°C to +50°C
- ... Storage Temperature:
-40°C to +60°C

Compatible with:

V-Drive GPD
V-Drive AMC
V-Drive EPC

OPTIPOINT 2

- ... Real-time keypad and display operation mimics Optidrive
- ... Single electrical interface for power and data
- ... Communicates with any compatible drive across a network
- ... Easy keypad switching to other network addresses
- ... IP54 rated when through panel mounted
- ... Bright LED Display
- ... Membrane keypad
- ... Parameter lock function available
- ... 3m Data Cable included

OPTIPAD

In addition to Optiport 2 features, Optipad benefits from:

- ... Multi-language TFT Display
- ... IP55 rated

Configuration

Depending on the requirement of the application, Optiport 2 and Optipad keypads can be used in the following different ways:

1 keypad with 1 drive



1 keypad with multiple Optidrives
(up to 63 max)



2 keypads with 1 drive



2 keypads with multiple Optidrives
(up to 63 max)




Add a communication interface or extend functionality

Optidrive Compatibility

AMC EPC

Field Bus

		OPT-2-PROFB-IN Supports PROFIBUS DPV1 Automatic Baud rate detection from 9.6kbps to 12mbps
		OPT-2-DEVNT-IN Galvanically isolated bus electronics Automatic baud rate detection CIP Parameter Object Support
		OPT-2-ETHNT-IN Two Ethernet /IP ports 10/100Mbit half duplex operation Supports DLR (Device Level Ring) and Linear network topology CIP Parameter object support
		OPT-2-MODIP-IN Two Ethernet /IP ports 10/100Mbit half duplex operation Modbus TCP with IT functionality
		OPT-2-ETCAT-IN Two Ethernet /IP ports 10/100Mbit half duplex operation EtherCAT slave device
		OPT-2-PFNET-IN Two Ethernet /IP ports 10/100Mbit half duplex operation
		OPT-2-BNTIP-IN Two Ethernet /IP ports 10/100Mbit half duplex operation Supports Linear network topology

Encoder Feedback

	OPT-2-ENCOD-IN Suitable for standard TTL type encoders Up to 4096ppr 5 Volt Power Supply on board Maximum Input Frequency up to 500kHz
	OPT-2-ENCHT-IN Suitable for 24 Volt HTL type encoders Up to 4096ppr Up to 500kHz input frequency

Extended I/O

	OPT-2-EXTIO-IN Provides an additional 3 Digital Inputs 2 Relay (Volt Free) Outputs
	OPT-2-CASCD-IN Provides an additional 3 Relay (Volt Free) Outputs Typical usage: Cascade control of Booster Pump sets

External I/O

	OPT-2-CANIO-IN Standalone external I/O module Additional 5 digital inputs Additional 3 relay outputs Connects via RJ45 socket
---	---



OptiTools Studio

OPTISTICK Smart
Rapid Commissioning Tool

OPT-3-STICK-IN

Powerful PC Software

Drive commissioning and parameter backup

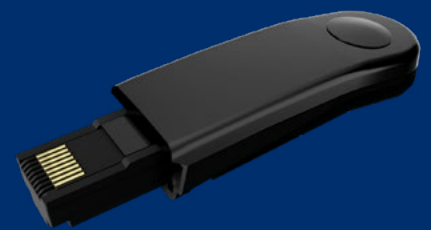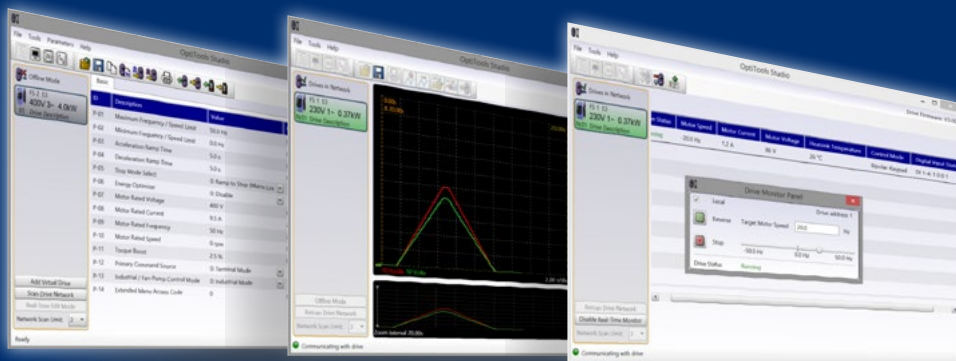

... Powerful PC based commissioning and programming software

... Multi Drive Network Support

Supports two key functions:

... Drive Programming & Commissioning

- Parameter Upload, Download & Storage
- Changed Parameter Highlighting
- Parameter List Printing

... Provides Access to Optidrive P2 & Eco PLC programming function

- Function Blocked Based PLC Logic Programming
- Advanced Drive Control Functions
- Multiple Functions can be easily combined to produce powerful solutions
- Program protection to prevent unauthorised copying

... Real-time scope function and data logging

... Real-time data monitoring

Compatible with:

Windows Vista, Windows 7,
Windows 8, Windows 8.1 & Windows 10

- Allows copying, backup and restore of drive parameters
- Provides Bluetooth interface to a PC running OptiTools Studio or the OptiTools Mobile app on a smartphone
- Onboard NFC (Near Field Communication) for rapid data transfer

Compatible with:

V-Drive GPD, V-Drive AMC, V-Drive EPC



PC Connection Kit

OPT-2-USB485-OBUS



OPT-2-USB-OBUS is a dedicated PC connection kit for all V-Drive models, allowing direct connection from the PC USB port to the drive RJ45 communication connection for use with Optitools studio software.


Key Benefits

- ... To provide interface between PC and drive
- ... For use with OptiTools Studio PC software
- ... Provides electrical isolation between PC and drive network

Features

- ... Isolated USB - RS485 connection adaptor
- ... USB2.0
- ... Compatible with Windows XP, Vista, 7, 8, 8.1, 10
- ... Supports Optitools Studio PC software connection to the drive
- ... 1.5 metre cable lengths

Configuration

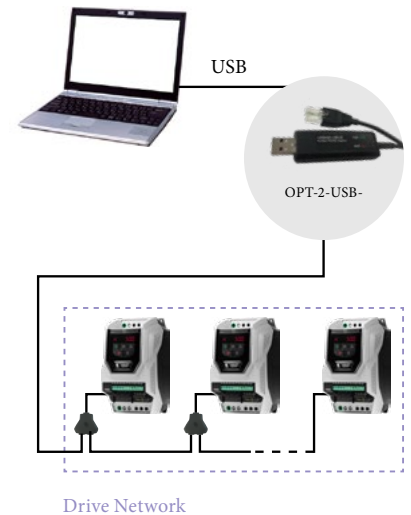

RS485 Data Cable Splitter

OPT-J45SP (RJ45 1 - 2 way)

RS485 data cable splitter is an RJ45 1 to 2-way connection block



RJ45 Data Cables

RJ45 to RJ45 RS485 Data Cable, 0.5m length, Blue
OPT-J4505

RJ45 to RJ45 RS485 Data Cable, 1.0m length, Blue
OPT-J4510

RJ45 to RJ45 RS485 Data Cable, 3.0m length, Blue
OPT-J4530



EtherNet Module

OPT-2-ETHEG-IN

- ODVA compliant EtherNet/IP Modbus Translator Device
- Compatible with all drive platforms: P2, E3 & Eco
- Integrated network switch: simplifying network architecture
- Compatible with RSLogix and CoDeSys PLCs



RJ45 8 Way Network Hub

OPT-2-RJHUB-

RJ45 Terminator

OPT-2-RJTRM-



Input Chokes


Reduce supply harmonic current distortion and increase protection against mains voltage spikes and notches

Input chokes can be used to reduce the supply line harmonic currents and voltage distortion generated by almost all inverter drives on the market today. DLM V-Drives have selected a range of chokes matched to the V-Drive range to provide the best reduction in supply current harmonics whilst also providing enhanced protection for the V-Drive against transient voltages ('spikes') or other mains borne interference.

Input chokes are available for the complete range of V-Drive products, and are recommended for use in all installations and in particular:




- ... where the local mains supply quality may be poor or unknown
- ... where high current switching loads such as large DC drives or soft starts are operating
- ... where the mains supply impedance is low
- ... in remote areas prone to lightening strikes

Fourier Analysis of Harmonic Distortion

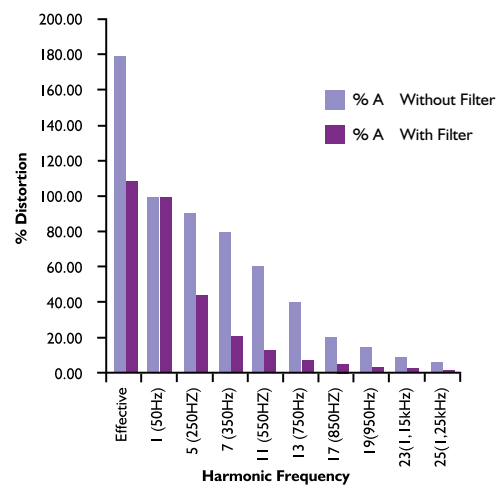

The graph shows the effect of using an input choke on typical 4kW/ 5HP drive. The 50Hz current is used as a reference and is the current which delivers the useful power to the motor. The reduction in the total effective (RMS) current is clear.

Part Number	Phases	V-Drive Size	Enclosure IP	Connection (mm ²)	L (mm)	H (mm)	B (mm)	Rated Volts	Rated Amps	Inductance (mH)	Weight (kg)
OPT-2-L1016-20	1	1	20	4	78	80	78	230 Max	16	1.8	1.1
OPT-2-L1025-20	1	2	20	10	85	158	76		25	1.1	1.8
OPT-2-L1016-66	1	1	66	4	82	70	70	230 Max	16	1.83	1.0
OPT-2-L1025-66	1	2	66	10	90	75	84		25	1.17	1.3
OPT-2-L3006-20	3	1	20	2.5	95	107	56	500 Max	6	4.8	1.3
OPT-2-L3010-20	3	2	20	2.5	125	127	71		10	2.9	2.5
OPT-2-L3036-20	3	3	20	10	190	205	82		36	0.81	7.2
OPT-2-L3050-20	3	4	20	16	190	220	102		50	0.58	8.7
OPT-2-L3090-20	3	5	20	35	240	280	107		90	0.32	16
OPT-2-L3006-66	3	1	66	2.5	115	88	74	600 Max	6	4.8	1.6
OPT-2-L3010-66	3	2	66	2.5	175	137	99		10	3.86	3.5
OPT-2-L3018-66	3	3	66	10	175	137	114		18	2.04	7
OPT-2-L3200-00	3	6	00	9	310	260	180	500	200	73.5	35
OPT-2-L3300-00	3	7	00	9	370	310	180		300	49.0	48

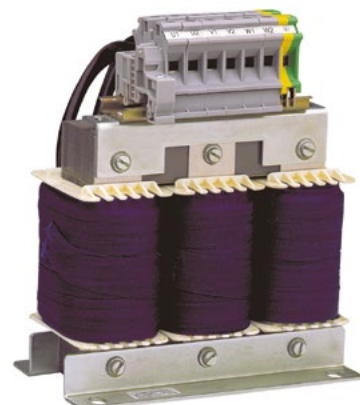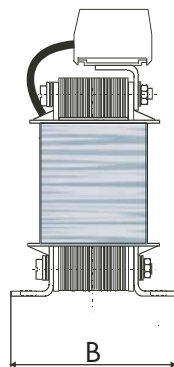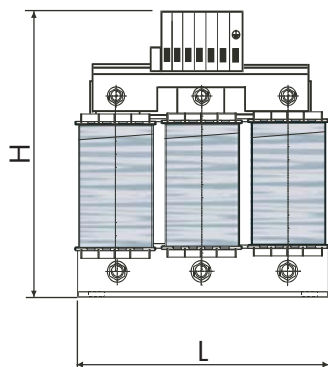

Output filters improve the quality of the output waveform

In most applications, the unfiltered output from an inverter drive gives satisfactory performance but to improve system functionality, reliability and longevity, output filtering is strongly recommended in some applications, including:


- ... Long motor cables, up to 200m
- ... High capacitance motor cables (i.e. typical “pyro” wire, used for fire protection)
- ... Multiple motors connected in parallel
- ... Motors without inverter grade insulation (typically older motors)

Key Features


- ... Limits output voltage gradient, typically $<200V/\mu s$
- ... Limits transient over voltages at the motor terminals, typically $<1000V$
- ... Suppression of mains conducted interference in lower frequency ranges
- ... Compensation of capacitive load currents
- ... Reduction of RFI emissions from the motor cable
- ... Reduction of motor losses and audible noise caused by ripple

Comparison of Characteristics

Without filter

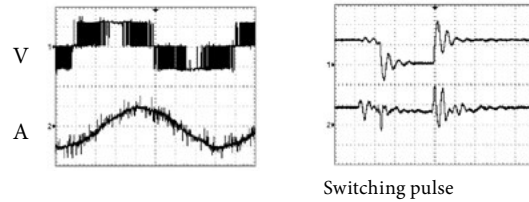


With filter

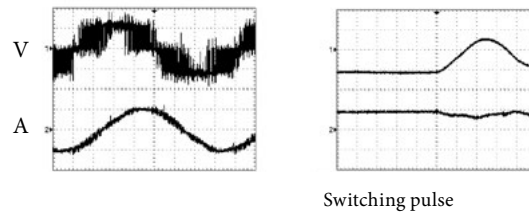

Note: Switching pulse rises slower and to a lower amplitude with filter.

Part Number	V-Drive Size	Enclosure IP	Connection (mm ²)	L (mm)	H (mm)	B (mm)	Rated Volts	Rated Amps	Inductance (mH)	Weight (kg)
OPT-2-M3008-20	1	20	2.5	95	107	61	500 Max	8	2.0	1.5
OPT-2-M3012-20	2	20	4	125	158	76		12	1.7	2.8
OPT-2-M3030-20	3	20	10	155	185	66		30	0.5	4.2
OPT-2-M3075-20	4 & 5	20	35	190	223	92		75	0.22	8.6
OPT-2-M3180-00	5 & 6	00	11	360	263	180	400 Max	180	0.09	30
OPT-2-M3300-00	7	00	9	380	310	180		300	0.053	48
OPT-2-M3008-66	1	66	2.5	115	85	74	600 Max	8	2.0	1.7
OPT-2-M3012-66	2	66	2.5	140	110	87		12	1.2	3.2
OPT-2-M3018-66	3	66	10	140	110	87		18	0.9	3.2

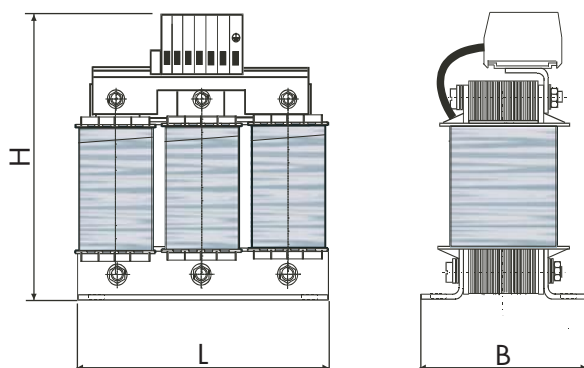


EMC Filters

OPTIFILTER

RFI Line Filters

All V-Drive products are manufactured as standard with an internal EMC filter, unless specified by the customer. In general, this internal filter will provide compliance with international standard requirements for the majority of industrial installations and applications.

Where a higher standard of EMC compliance is desired or required, V-Drives can provide a range of suitable filters to ensure that an EMC compliant solution for all possible applications can be realised.

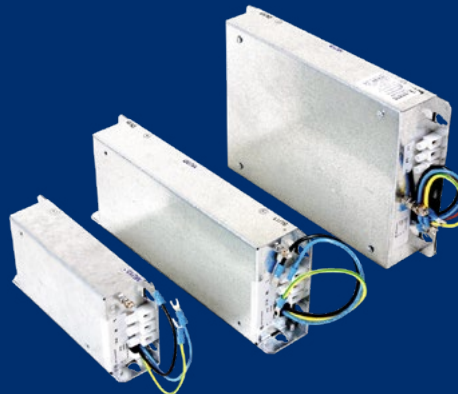

Part Number	Supply Phases	V-Drive Size	Enclosure IP	Length (mm)	Width (mm)	Depth (mm)	Rated Amps	Weight (kg)
OPT-2-E1010-20	1	1	20	180	70	65	10	1.5
OPT-2-E1025-20	1	2	20	250	70	65	25	2.8
OPT-2-E1010-66	1	1	66	180	70	65	10	1.5
OPT-2-E1025-66	1	2	66	250	70	65	25	2.8
OPT-2-E3006-20	3	1	20	210	85	60	6	2.7
OPT-2-E3016-20	3	2	20	230	120	65	16	2.7
OPT-2-E3025-20	3	3	20	230	120	65	25	2.7
OPT-2-E3050-20	3	4	20	115	150	65	50	TBC
OPT-2-E3080-20	3	5	20	373	170	65	80	TBC
OPT-2-E3180-20	3	6	20	470	180	115	180	TBC
OPT-2-E3300-00	3	7	0	660	260	130	300	TBC
OPT-2-E3006-66	3	1	66	210	85	60	6	2.7
OPT-2-E3016-66	3	2	66	230	120	65	16	2.7
OPT-2-E3025-66	3	3	66	200	150	65	25	2.7

Brake Resistors

OPTIBRAKE

Dynamic Braking Resistors

Optibrake dynamic braking resistors are designed specifically for the V-Drive range. For use with high inertia loads which need to be stopped rapidly. Optibrake dynamic braking resistors assist the V-Drive in managing the electrical energy returned from the motor during braking by converting it to heat energy.



Part Number	V-Drive Size	Resistance	Rated Voltage	Rated Power (W)	
				Continuous	Peak
OD-BR100-IN	2, 3	100	900 VDC	200	12000
OD-BRES4-IN	4, 5	22	900 VDC	500	21000

Local Isolator





Local isolator option allows complete disconnection of the incoming AC power to the drive. The isolator mounts directly to the drive, and provides a local disconnect option. The handle can be padlocked in the off position for safe maintenance.

Part Number	V-Drive Size	H (mm)	W (mm)	D (mm)
OPT-2-ISOLO-S4	4	170	173	80
OPT-2-ISOLO-S5	5	230	235	100

Through Hole Mount Kit

Through hole mount kits allow V-Drives to be mounted through panel, ensuring that the heat from the drives heat sink is kept spate from the control electronics. This allows the optimum panel cooling arrangement to be used, with best possible separation of hot and cold air.

Through panel mounting kits can be used with all IP55 frame size 4–7 units.

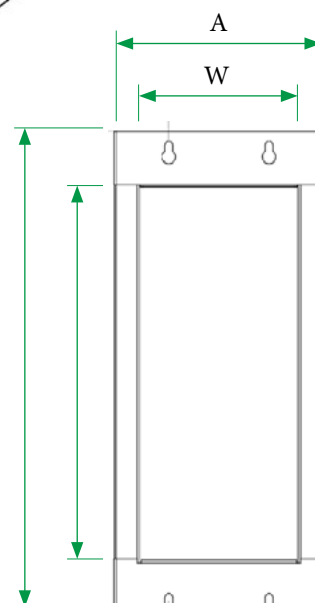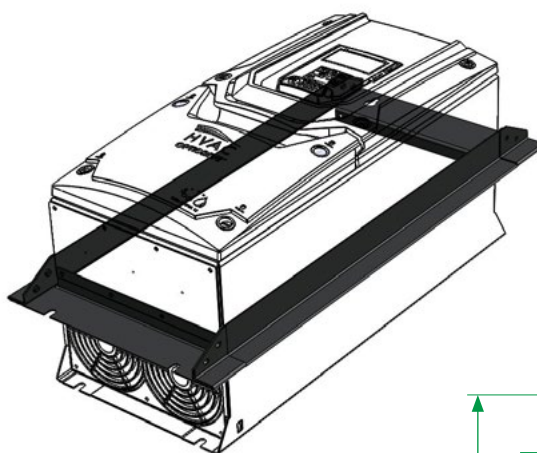

Part Number	V-Drive Size	Panel Cut Out Dimensions		Mount Dimensions	
		H mm (in)	W mm (in)	A mm (in)	D mm (in)
OPT-2-THMT04	4	425 (17.3)	180 (7.09)	228 (8.98)	521.5 (20.53)
OPT-2-THMT05	5	515 (21.26)	240 (9.65)	292 (11.5)	612.5 (24.11)
OPT-2-THMT06	6	815 (34.06)	335 (13.39)	398 (15.67)	924 (36.38)
OPT-2-THMT07	7	1230 (50.4)	335 (13.39)	398 (15.67)	1342 (52.83)

	Part Number	Description	GPD	AMC	EPC
Braking Resistors	OD-BR100-IN	Brake Resistor, Size 2, 100R, 200W			
	OPT-BR050-IN-155	Brake Resistor, IP55, Size 2, 200W, 50R			
	OD-BRES4-IN	Brake Resistor, Size 4, 33R, 500W			
Communication Interfaces	OPT-2-ETCAT-IN	EtherCAT Plug In Interface Module			
	OPT-2-PROFB-IN	Profibus DPV-1 Plug In Interface Module			
	OPT-2-PFNET-IN	Profinet IO Plug In Interface Module			
	OPT-2-ETHNT-IN	EthernetIP Plug In Interface Module			
	OPT-2-DEVNT-IN	DeviceNet Plug In Interface Module			
	OPT-2-BNTIP-IN	Bacnet IP Plug in Interface			
	OPT-2-MODIP-IN	Modbus TCP Plug In Interface Module			
	OD-PROFB-IN	Profibus External Gateway & Cables			
	OD-DEVNET-IN	DeviceNET External Gateway & Cables			
	OPT-2-ETHEG-IN	EtherNet Module			
Communications Options	OPT-2-STICK-IN	Optistick with Bluetooth Interface			
	OPT-2-USB-OBUS	USB PC Connection Kit			
Encoder Feedback Interfaces	OPT-2-ENCHT-IN	Incremental Encoder Feedback Plug In Option Module (12 - 30Volt)			
	OPT-2-ENCOD-IN	Incremental Encoder Feedback Plug In Option Module (5Volt)			
External EMC Filters	OPT-2-E1010-20	Optifilter EMC Input Filter, 1 Phase, 10 Amp, IP20			
	OPT-2-E3006-20	Optifilter EMC Input Filter, 3 Phase, 6 Amp, IP20			
	OPT-2-E1025-20	Optifilter EMC Input Filter, 1 Phase, 25 Amp, IP20			
	OPT-2-E3016-20	Optifilter EMC Input Filter, 3 Phase, 16 Amp, IP20			
	OPT-2-E3025-20	Optifilter EMC Input Filter, 3 Phase, 25 Amp, IP20			
	OPT-2-E3050-20	Optifilter EMC Input Filter, 3 Phase, 50 Amp, IP20			
	OPT-2-E3080-20	Optifilter EMC Input Filter, 3 Phase, 80 Amp, IP20			
	OPT-2-E3180-20	Optifilter EMC Input Filter, 3 Phase, 180 Amp, IP20			
	OPT-2-E3300-00	Optifilter EMC Input Filter, 3 Phase, 300 Amp, IP00			
External EMC Filters IP66	OPT-2-E1010-66	Optifilter EMC Input Filter, 1 Phase, 10 Amp, IP66			
	OPT-2-E3006-66	Optifilter EMC Input Filter, 3 Phase, 6 Amp, IP66			
	OPT-2-E1025-66	Optifilter EMC Input Filter, 1 Phase, 25 Amp, IP66			
	OPT-2-E3016-66	Optifilter EMC Input Filter, 3 Phase, 16 Amp, IP66			
	OPT-2-E3025-66	Optifilter EMC Input Filter, 3 Phase, 25 Amp, IP66			
Frame Size 8 Accessories	OPT-2-L31500-00	Frame Size 8 AC Line Choke 500A, 1%			
	OPT-2-M3500-00	Frame Size 8 Output Choke 500A			
	OPT-2-L3500-00	Frame Size 8 AC Line Choke 500A, 4%			
	OPT-2-E3500-00	Frame Size 8 EMC Filter			
I/O Options	ODP-2ROUT-IN	Dual Relay Output Card			
	OPT-HVACO-IN	HVACO Drive Running & Tripped Relay Output Card			
	OPT-2-CASCD-IN	Cascade Control Plug In Option Module			
	OPT-2-EXTIO-IN	Extended I/O Plug In Option Module			
	OPT-LOGIP-11	110V Logic Input Card			
	OPT-LOGIP-23	230V Logic Input Card			
	OPT-2-LOCMO-IN	Optidrive P2 / HVAC Local Mouse			
	OPT-2-CANIO-IN	External Remote I/O Interface			
Input Chokes	OPT-2-L1016-20	Input Choke, 1 Phase, 16 Amp, IP20			
	OPT-2-L1025-20	Input Choke, 1 Phase, 25 Amp, IP20			
	OPT-2-L3006-20	Input Choke, 3 Phase, 6 Amp, IP20			
	OPT-2-L3010-20	Input Choke, 3 Phase, 10 Amp, IP20			
	OPT-2-L3036-20	Input Choke, 3 Phase, 36 Amp, IP20			
	OPT-2-L3050-20	Input Choke, 3 Phase, 50 Amp, IP20			
	OPT-2-L3090-20	Input Choke, 3 Phase, 90 Amp, IP20			
	OPT-2-L3200-00	Input Choke, 3 Phase, 200 Amp, IP00			
	OPT-2-L3300-00	Input Choke, 3 Phase, 300 Amp, IP00			
Input Chokes IP66	OPT-2-L1016-66	Input Choke, 1 Phase, 16 Amp, IP66			
	OPT-2-L1025-66	Input Choke, 1 Phase, 25 Amp, IP66			
	OPT-2-L3006-66	Input Choke, 3 Phase, 6 Amp, IP66			
	OPT-2-L3010-66	Input Choke, 3 Phase, 10 Amp, IP66			
	OPT-2-L3018-66	Input Choke, 3 Phase, 18 Amp, IP66			
Local Isolator	OPT-2-ISOLO-S4	Local Isolator, Frame Size 4			
	OPT-2-ISOLO-S5	Local Isolator, Frame Size 5			
Output Filters	OPT-2-M3008-20	Output Filter, 8 Amp, IP20			
	OPT-2-M3012-20	Output Filter, 12 Amp, IP20			
	OPT-2-M3030-20	Output Filter, 30 Amp, IP20			
	OPT-2-M3180-00	Output Filter, 180 Amp, IP20			
	OPT-2-M3075-20	Output Filter, 75 Amp, IP20			
	OPT-2-M3300-00	Output Filter, 300 Amp, IP00			
Output Filters IP66	OPT-2-M3008-66	Output Filter, 8 Amp, IP66			
	OPT-2-M3012-66	Output Filter, 12 Amp, IP66			
	OPT-2-M3018-66	Output Filter, 18 Amp, IP66			
PLC Licence	OPT-STUDIO-IN	Optitools Studio PLC Function Single PC Licence			
Remote Keypads	OPT-2-OPORT-IN	Optiport 2 with RJ45 Cable			
	OPT-2-OPPAD-IN	Optipad Remote OLED Keypad with RJ45 Cable			
	OPT-2-OPDTK-IN	Optipad Remote OLED Keypad with RJ45 Cable (Turkish)			
RJ45 Accessories	OPT-J4505-IN	RS485 Data Cable, 0.5M RJ45			
	OPT-J4510-IN	RS485 Data Cable, 1.0M RJ45			
	OPT-J4530-IN	RS485 Data Cable, 3.0M RJ45			
	OPT-J45SP-IN	RS485 3 Way Data Cable Splitter RJ45			
	OPT-2-BNTSP-IN	RJ45 BacNet connector			
	OPT-2-RJHUB-IN	RS485 8 Way Network Hub RJ45			
	OPT-2-RJTRM-IN	RJ45 Terminator			
Through Hole Mount Kits	OPT-2-THMT04	Through Hole Mount Kit Frame Size 4			
	OPT-2-THMT05	Through Hole Mount Kit Frame Size 5			
	OPT-2-THMT06	Through Hole Mount Kit Frame Size 6			
	OPT-2-THMT07	Through Hole Mount Kit Frame Size 7			



Call Duplex Liquid Meters
+27 (0) 11 457 0500


With over 55 years' experience, Duplex Liquid Meters (DLM) offers expert advice on a comprehensive range of products. We are renowned for providing the right solutions for overpressure protection; flow, level and density measurement; automation and control requirements. The company maintains a substantial stock holding and has a branch infrastructure capable of providing skilled technical and sales service.

DLM's products are either locally manufactured or distributed in terms of license agreements with overseas suppliers. DLM has in-house technicians to service products, an engineering team that is capable of delivering small projects as well as a workshop and test facility. The company is ready to offer its customers the knowledge and support required.




Global Drive Solutions

V-Drives operate at the heart of automated systems for a variety of applications



Crane Control



Machine Tool OEM



Manufacturing



Food Processing



Amusement Parks

DLM V-Drives are manufactured by Invertek Drives under agreement.

No part of this catalogue may be reproduced or transmitted in any form or by any means, electrical or mechanical including photocopying, recording or by any other form of information storage or retrieval system without permission in writing from the publisher.

www.dlm.co.za

Duplex Liquid Meters (Pty) Ltd Head Office

1 Angus Crescent
Longmeadow Business Estate East
Modderfontein

Tel: +27 (0) 11 457 0000
Fax: +27 (0) 11 608 4999
Email: sales@dlm.co.za

Branches:

- Cape Town +27 (0) 21 551 0727
- Durban +27 (0) 31 705 1966
- East London +27 (0) 43 722 1309
- Johannesburg +27 (0) 11 457 0500
- Rustenburg +27 (0) 14 596 7086
- Welkom +27 (0) 57 355 3081

